

2026

AUTOMOTIVE REPAIR&REFINISHING SOLUTIONS GUIDE

Automotive | Marine | Aerospace | Motorcycle | Train



AUTOMOTIVE



MARINE



AEROSPACE



MOTORCYCLE



TRAIN



TMiles Industrial Materials and Solutions Co., Ltd.

COMPANY PROFILE


Professional Automotive Refinish Solution Provider

We are a specialized manufacturer and exporter of automotive refinish abrasives and bodyshop consumables, serving professional importers and distributors across Europe and international markets.

With a strong focus on quality consistency and structured product strategy, we provide not just individual products — but complete, market-oriented solutions designed to support sustainable business growth. Our product portfolio covers the entire collision repair process, including sanding, masking, mixing, polishing, and selected supporting tools.

By offering a balanced combination of fast-moving volume items and high-margin categories, we help our partners optimize purchasing structure, protect profitability, and increase repeat business.

Our focus is not only on manufacturing products — but on providing practical, market-oriented solutions that help our partners grow sustainably. We believe long-term cooperation is built on reliability, transparency, and mutual growth. Your Business Stability Is Our Priority

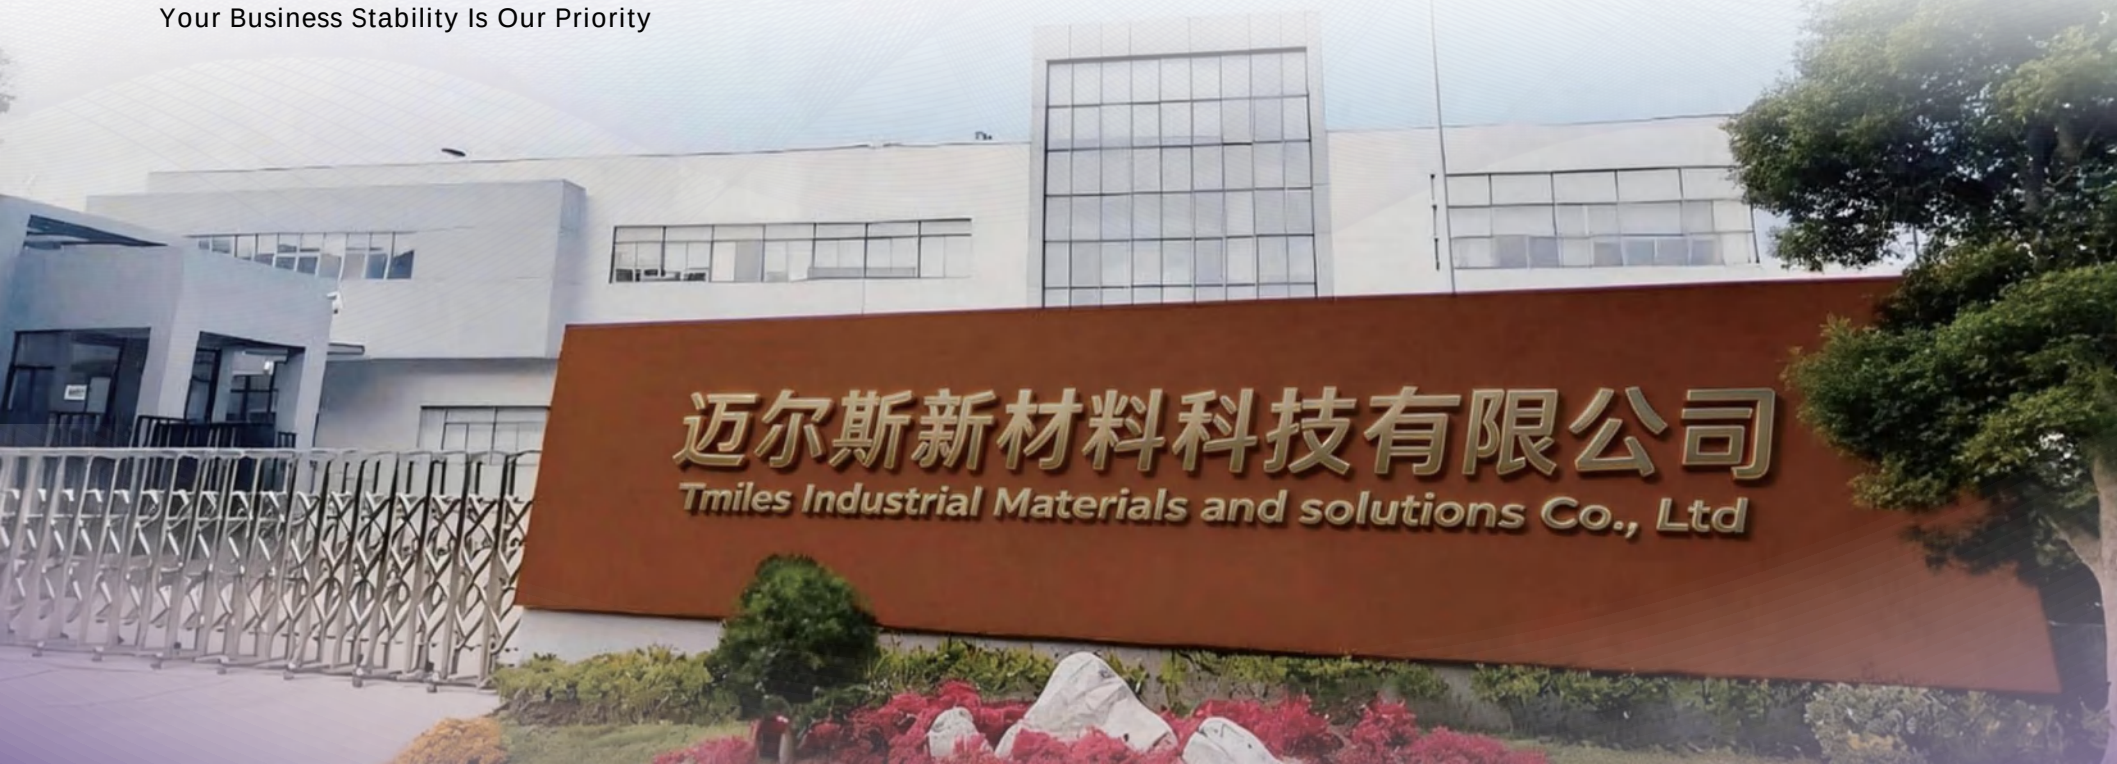

迈尔斯新材料科技有限公司
Tmiles Industrial Materials and solutions Co., Ltd

CONTENTS ...

Abrasives Products	P02-20
Masking & Paint Protection	P21-34
Paint Preparation Products	P35-41
Tools&Accessories	P42-47
Polishing &Detailing	P48-57
Personal Protection	P61-64

PRODUCTS FOR REAL CRAFTSMEN



AUTOMOTIVE



MARINE



AEROSPACE



MOTORCYCLE



TRAIN

The background of the image consists of several overlapping, wavy, purple-colored lines that create a sense of depth and movement. These lines are composed of many fine, parallel strokes, giving the background a textured, almost fabric-like appearance. The waves flow from the left side towards the right, with some peaks and valleys. The overall color is a muted, dusty purple.

PRODUCTS ABRASIVES




**TNA02 CUTTING DISC
STANDARD QUALITY**



**TNA05 CUTTING DISC
SUPER LONG LIFE**



**TNG09 GRINDING DISC
FAST MATERIAL REMOVAL**

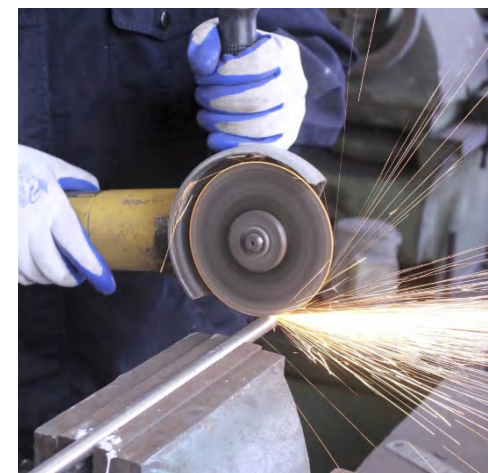

FEATURES

- Sharp, stable cutting and grinding performance
- Long service life with reinforced construction
- Smooth operation with reduced vibration
- Suitable for professional metalworking use

APPLICATION GUIDE

- TNA02: ideal for stainless steel and general metal surfaces
- TNA05: suitable for general metal cutting and fabrication
- TNG09: ideal for grinding, deburring, and weld preparation

PRODUCT NOTES

- TNA02 / TNA05: Type 41 flat cut-off discs, Designed for use on angle grinders
- TNG09: Type 27 depressed-center grinding disc
- Use with proper guard and personal protective equipment

MODEL NO.	SIZE (MM)	THICKNESS	BORE (MM)	TYPE	QUALITY / PERFORMANCE	APPLICATION
TNA02	115 x 1.0 x 22.23 mm	1.0 mm	22.23	T41 (Flat)	Standard Quality	Cutting – stainless steel, General Metal Cutting
TNA02	125 x 1.0 x 22.23 mm	1.0 mm	22.23	T41 (Flat)	Standard Quality	Cutting – stainless steel, General Metal Cutting
TNA02	115 x 1.6 x 22.23 mm	1.6 mm	22.23	T41 (Flat)	Standard Quality	Cutting – stainless steel, General Metal Cutting
TNA02	180 x 1.6 x 22.23 mm	1.6 mm	22.23	T41 (Flat)	Standard Quality	Cutting – stainless steel, General Metal Cutting
TNA05	115 x 1.0 x 22.23 mm	1.0 mm	22.23	T41 (Flat)	Super Long Life	General INOX&Metal cutting
TNA05	125 x 1.0 x 22.23 mm	1.0 mm	22.23	T41 (Flat)	Super Long Life	General INOX&Metal cutting
TNA05	115 x 1.6 x 22.23 mm	1.6 mm	22.23	T41 (Flat)	Super Long Life	General INOX&Metal cutting
TNA05	180 x 1.6 x 22.23 mm	1.6 mm	22.23	T41 (Flat)	Super Long Life	General INOX&Metal cutting
TNG09	115 x 6.4 x 22.22 mm	6.4 mm	22.22	T27	Fast Material Removal	Grinding / deburring
TNG09	180 x 6.4 x 22.22 mm	6.4 mm	22.22	T27	Fast Material Removal	Grinding / deburring




TMFC INDUSTRIAL

Imported Ceramic Jumbo Roll



TMFC PROFESSIONAL

Domestic Ceramic Jumbo Roll



TMFZ INDUSTRIAL

Imported Zirconia Jumbo Roll




TMFZ PROFESSIONAL

Domestic Zirconia Jumbo Roll



TMFZ STANDARD

Domestic Zirconia Jumbo Roll

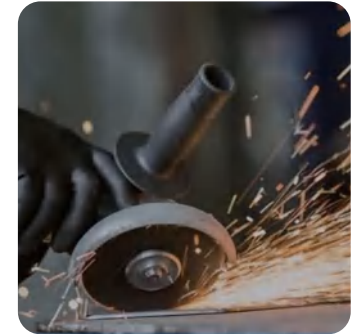

TMFA STANDARD

Domestic Alumina Jumbo Roll


Inch	Arbor	Metric(mm)	Type	Grit	RPM	Backing
4.5"	7/8" , 5/8"-11	115	T27/T29	40/60/80/120	13300	Fiber glass/Plastic Backing
5"	7/8" , 5/8"-11	125	T27/T29	40/60/80/120	12200	Fiber glass/Plastic Backing
7"	7/8" , 5/8"-11	180	T27/T29	40/60/80/120	8500	Fiber glass/Plastic Backing

Flap discs are used for polishing and grinding welds and rough surfaces. This product is an excellent alternative to resin fiber discs or grinding discs. Flap discs are more economical, quieter, and less vibrate, so they are more comfortable to use. Ceramic/Zirconia/Alumina abrasive grains available.


Depending on the customer's specific requirements, we have a wide range of Flap blades to choose from. The customer can determine the material (cloth type), backing, size, and particle size.



Color: Orange Material: Ceramic



Color: Purple Material: Silicon Carbide

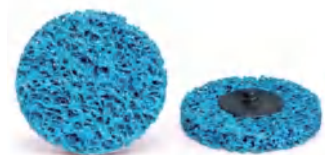

Color: Blue Material: Silicon Carbide



Color: Black Material: Silicon Carbide

Name Cleaning Stripper Disc
Material Silicon carbide; Ceramic
Color Black,Blue,Purple,Orange
Diameter 100mm,115mm,125mm,150mm,180mm
Application remove paint and under coating
Hardness Orange>Purple>Blue>Black

Name Quick-Change Cleaning Stripper Disc
Material Silicon carbide; Ceramic
Color Orange, Purple, Blue, Black
Diameter 50mm,75mm
Application remove paint and under coating
Hardness Orange>Purple>Blue>Black

TCSD Cleaning Stripper Disc is made from an extremely durable three-dimensional web that has a soft edge allowing it to remove paint and other coatings in those hard to get at creases and dents with less metal removed. Use to remove paint, rust and seam sealers without excessive metal removal or gouging of the metal. TCSD can also be used with the Roloc disc pad assembly as well.

MODEL	Size-mm	Abrasive	Color	Central Hole
T-STC	100*16mm	Ceramic	Orange	22mm
	115*22mm			
	150*22mm			
T-STD	100*16mm	Silicon Carbide	Blue/Purple/Black	22mm
	115*22mm			
	150*22mm			
T-STE	100*13mm	Silicon Carbide	Purple/Black	13mm
	115*13mm			

Size-mm	Arbor	Size-Inch	MAX.R.P.M	Abrasive
50mm	Type R	2"	22000	Silicon Carbide,Nylon,ceramic
75mm		3"	12000	Silicon Carbide,Nylon,ceramic
50mm	Type S	2"	22000	Silicon Carbide,Nylon,ceramic
75mm		3"	12000	Silicon Carbide,Nylon,ceramic





T-SCD QUICK CHANGE SURFACE CONDITIONING DISC

- Water and oil resistant, Good anti-clogging performance.
- Smart thread design, Quick and convenient replacement of the grinding head.
- Screw safety locks, leading to low chance of “ fly off ” when in use.

Surface Conditioning Disc comes in a wide variety of grades and sizes and is an ideal first-step for cleaning, blending, deburring, and finishing. Durable, non-woven fiber construction conforms well on irregular or contoured surfaces without undercutting or damaging the base material.

Size	Grain	RPM	Type	Color
2"	Coarse	25,000	Type S / Type R	Brown
2"	Medium	25,000	Type S / Type R	Maroon
2"	Very fine	25,000	Type S / Type R	Blue
3"	Coarse	20,000	Type S / Type R	Brown
3"	Medium	20,000	Type S / Type R	Maroon
3"	Very fine	20,000	Type S / Type R	Blue



T-QCR QUICK CHANGE ROLOC SANDING DISC

- Self-sharpening grain and cool grinding aid for fast, aggressive cutting action on hard-to-grind materials.
- Polyester backing material for long working life.
- Use on steel, stainless and heat sensitive materials.
- Available for Ceramic/Zirconia/Alumina oxide grain.
- Self-sharpening grain and cool grinding aid for fast, aggressive cutting action on hard-to-grind materials.
- Polyester backing material for long working life.
- Use on steel, stainless and heat sensitive materials.

T-QCR quick change roloc sanding disc used to clean welding joints (spots) and remove corrosion, rust, paint, and oxides; remove paint, varnish, sealants and mixtures; clean hard-to-reach areas; quickly remove surface contaminants. This product is suitable for automobile manufacturing and repair industry, construction industry, chemical light industry, shipbuilding and repair industry, machinery manufacturing industry, furniture manufacturing, decoration industry, municipal engineering, and self-repair.

Size	Grain	RPM	Type
2"	36	25,000	Type S / Type R
2"	40	25,000	Type S / Type R
2"	60	25,000	Type S / Type R
2"	80	25,000	Type S / Type R
2"	120	25,000	Type S / Type R
3"	36	20,000	Type S / Type R
3"	40	20,000	Type S / Type R
3"	60	20,000	Type S / Type R
3"	80	20,000	Type S / Type R
3"	120	20,000	Type S / Type R

Surface Preparation

TMile's sandpaper is a real all-rounder in the abrasive world. It doesn't matter if you're dealing with an old tough paint layer or a sensitive woodworking surface. Hard metals? No problem. Flexible plastics? It can handle them too. You'll find it being used on the sleek exteriors of cars, the massive hulls of ships, the precision parts of airplanes, and in the cozy settings of home decoration projects. It's all over the place, and it's become a great helper for making products better in all sorts of industries.


Overview of Abrasive Grade	P8
Film Backing Abrasives	P9-11
Paper Backing Abrasives	P12-13
Net Mesh Abrasives	P14-15
Foam Backing Abrasives	P16-20
Non Woven Abrasives	P21
Sponge Abrasives	P22




Get underway with the right abrasive .

TL803-Purple	TL853-Blue	TL636-Green	TL434-Brown	TL920-Purple
CutRate ●●●●●	CutRate ●●●●●	CutRate ●●●●●	CutRate ●●●●●	CutRate ●●●●●
DiscLife ●●●●●	DiscLife ●●●●●	DiscLife ●●●●●	DiscLife ●●●●●	DiscLife ●●●●●
DustExtraction ●●●●●	DustExtraction ●●●●●	DustExtraction ●●●●●	DustExtraction ●●●●●	DustExtraction ●●●●●
Grit P40-2000	Grit P40-800	Grit P40-800	Grit P40-800	Grit P40-800
Sizes 3",5",6",7"	Sizes 3' 5' 6' 7'	Sizes 3",5",6",7"	Sizes 3",5",6",7"	Sizes 3",5",6",7"
Technology Ceramic	Technology Ceramic	Technology Zirconia	Technology Ceramic	Technology Ceramic
Material PET Film (Multi-hole)	Material C-wt Paper	Material PET Film	Material C-wt Paper	Material Mesh Net
AttachmentType Velcro	Attachment Type Velcro	AttachmentType Velcro	AttachmentType Velcro+PSA	AttachmentType Velcro

Faster cut. Longer life. Consistent finish.

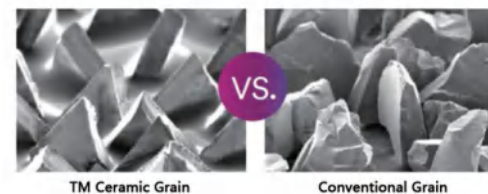


Premium TL80-Purple Ceramic Grain + Film Backing

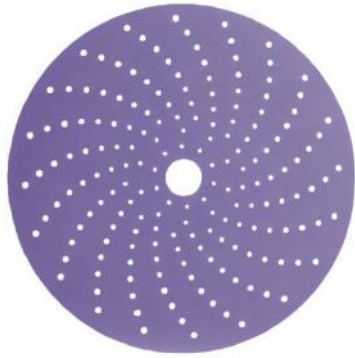


TL803-Ceramic Sanding Disc



TL80V-Ceramic V-Shape Sanding Roll

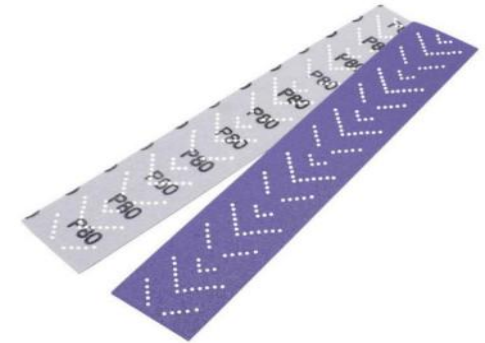

TL80L-Ceramic Sanding Strip



Sheet Size:
70mmx70mm
2.75inx2.75in

Roll Size:
70mmx12m
2.75inx13.12yd




Grain: Ceramic + Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Purple
Attachment: Hook&loop Velcro for random orbital sanders
Backing: PET Film
Bonding: Resin over Resin
Hole Pattern: 0-5-6-7-8-9-15-17-hole, multi-hole pattern
Grit: P40 to 2000 grit
Coating: Open coat

Stronger Backing Film
 Attachment System
 Better Tear Resistant
 Wet or dry sanding
 Application Focus
 Excellent Finish




TL80 works on a variety of surfaces, such as all metals, aluminum, carbon steel, composites, wood, fiberglass, gelcoats, topcoats and paints. : Film backing, which provides greater tear resistance and edge retention, making it durable for heavy-duty applications. Hookit™ hook-and-loop attachment for easy and quick disc change-outs, ensuring compatibility with power tools. Available in various grit sizes to suit different sanding requirements. Typically available in wet or dry sanding condition, waterproof. TL80 focus on primarily designed for stock removal and heavy-duty sanding tasks.

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL803	TL803.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P40.60.80.100.120.150.180.240.320.400.500.600.800	100 PCS/BOX
TL80V	TL80V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL80L	TL80L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P40.60.80.100.120.150.180.240.320.400.500.600.800	50 PCS/BOX




**TL853-Blue Ceramic Grain
+ Paper Backing**



Grain: Ceramic + Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Blue
Attachment: Hook&loop Velcro for random orbital sanders
Backing: Paper Backing
Bonding: Resin over Resin
Hole Pattern: 0-5-6-7-8-9-15-17-hole, multi-hole pattern
Grit: P40 to 800 grit
Coating: Open coat




**TL85V-Ceramic
V-Shape Sanding Roll**




Sheet Size:
70mmx70mm
2.75inx2.75in

Roll Size:
70mmx12m
2.75inx13.12yd

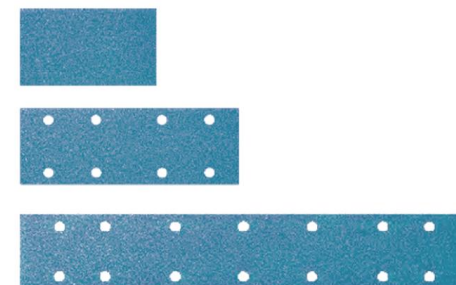

**TL85L-Ceramic
Sanding Strip**





70x125mm

70x198mm

70x420mm

Better Lifespan
 Dry sanding
 Application Universal
 Excellent Finish
 Different Stages of Repair



TL85 jumbo roll is designed for various universal industrial applications. TL85 is a high-performance tool that combines advanced technology with practical features, making it an excellent choice for industrial sanding tasks. Features Precision-Shaped Grain, which is triangular in shape. This technology allows the disc to cut at least 30% faster and last at least 30% longer than conventional ceramic abrasives. Available in a wide range of grit sizes, typically from grit 40 to grit 800, suitable for various sanding tasks. TL85 is ideal for paint removal, shaping body filler, feather-edging, final sanding before priming and general sanding.

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL853	TL853.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P40.60.80.100.120.150.180.240.320.400.500.600.800	100 PCS/BOX
TL85V	TL85V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL85L	TL85L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P40.60.80.100.120.150.180.240.320.400.500.600.800.	50 PCS/BOX

A675 SANDPAPER

Premium Latex Paper Abrasive



FEATURES & BENEFITS



Premium heat-treated grain

Fast cutting action and long life deliver consistent, professional results.



Flexible paper backing

Strong yet flexible latex paper provides excellent conformability and durability for hand sanding.



Versatile dry sanding

Ideal for sanding old paint, primer, primer surfacer, and between color coats.



Professional performance



Perfect for surface preparation, scratch refinement, feather-edging, and finishing applications.

SPECIFICATIONS

MODEL NO.	A675
PRODUCT NAME	A675 SANDPAPER
SIZE	230 × 280 mm
GRIT RANGE	180# / 240# / 320# / 400# / 600# / 800#
APPLICATION	For dry sanding old paint, primer, primer surfacer, and between color coats

A675 SANDING DISC

Premium Heat-Treated Paper Disc

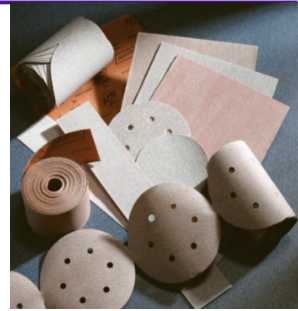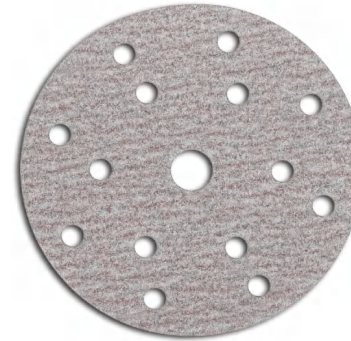

FEATURES & BENEFITS



Premium heat-treated grain

Provides 30%–50% faster cut rate and extended service life.



B-weight latex reinforced backing

Tear-resistant yet flexible paper backing allows easier disc removal and improved durability.



Superior bond system

Optimized grain adhesion supports consistent sanding performance.



Versatile dry sanding


Suitable for old paint, primer, primer surfacer, deburring, removing sand scratches, shaping and finishing plastic, filler, and feather-edging repaired areas.

SPECIFICATIONS

MODEL NO.	A675
PRODUCT NAME	A675 SANDING DISC
SIZE	6 inch / 150 mm
GRIT RANGE	60# / 80# / 120# / 180# / 240# / 320# / 400# / 600# / 800#
APPLICATION	Dry sanding old paint, primer, filler and between color coats




Standard TL70-Green Zircornia Grain + Film Backing

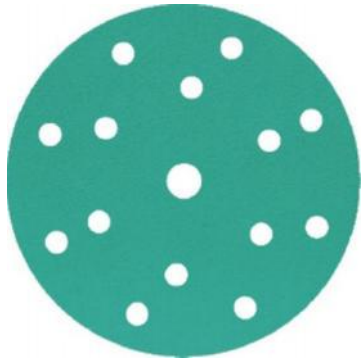

**TL703-zircornia
Sanding Disc**



**TL70V-zircornia
Velcro Sanding Roll**

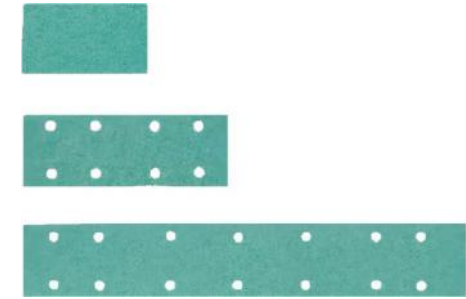

**TL70L-zircornia
Sanding Strip**



Roll Size:
70mmx12m
2.75inx13.12yd



Grain: Zircornia+ Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Green
Attachment: Hook&loop Velcro for random orbital sanders
Backing: PET Film
Bonding: Resin over Resin
Hole Pattern: 0-5-6-7-8-9-15-17-hole, multi-hole pattern
Grit: P80 to 600 grit
Coating: Open coat

Zircornia Grain
Efficient Dust Management
Convenient Attachment
Versatility Surface Sanding
Waterproof Sanding
Condition
Longer Life than
Convnetional Grain



TL70 jumbo roll is designed to deliver superior performance in heavy-duty sanding tasks, combining advanced technology with practical features to enhance productivity and efficiency. The mixed ceramic grains and durable film backing ensure the disc lasts up to 1.5 times longer than traditional aluminum oxide abrasives. The open-coat construction helps prevent clogging, ensuring consistent performance and longer disc life. The velcro system allows for quick and clean attachment and removal of the disc, enhancing work efficiency. Suitable for various substrates and applications, making it a versatile tool for industrial and automotive repair. Typically available in wet or dry sanding condition, waterproof with stronger backing

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL703	TL703.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P60.80.120.150.180.240.320.400.500.600.800.1000.1500.2000	100 PCS/BOX
TL70V	TL70V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600.800	1 PC/BOX
TL70L	TL70L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P60.80.120.150.180.240.320.400.500.600.800	50 PCS/BOX

Standard TL43-Brown Ceramic Grain + Paper Backing



TL434-Ceramic Sanding Disc

● No Holes ● 6 Holes ● 8 Holes ● 9+1 Holes ● 15 Holes ● 17 Holes




TL43V-Ceramic PSA Sanding Roll



Sheet Size:
70mmx70mm
2.75inx2.75in

Roll Size:
70mmx12m
2.75inx13.12yd

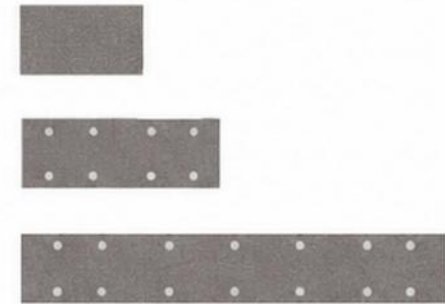

TL43L-Ceramic Sanding Strip



Grain: Ceramic + Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Brown
Attachment: Hook&loop Velcro or Pressure-Sensitive Adhesive (PSA) options
Backing: Latex C weight paper
Bonding: Resin over Resin
Hole Pattern: 0-5-6-7-8-9-15-17-hole pattern
Grit: P40 to 800 grit
Coating: Semi open coat


Stearate Coating
Less heating
Anti-loading
Versatility
Convenient Attachment



TL43 jumbo roll is designed for a wide range of applications, including metal, wood, composite, paintings etc. The semi-open coating, plus a special stearate, prevents the product from clogging. Suitable for all random orbital sanders with and without dust removal. Cut faster, run cooler with special stearate cooling coating, and last longer than traditional abrasives. The water-based stearate coating prevents clogging, ensuring consistent performance and longer disc life. Suitable for a wide range of materials and applications, making it a versatile choice for both manual and machine sanding. Hook and Loop or PSA backing allows for easy mounting and changing of discs.

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL434	TL434.150.0040	Ø75 / Ø125 / Ø150 / Ø178	P40.60.80.120.150.180.240.320.400.500.600.800	100 PCS/BOX
TL43V	TL43V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL43L	TL43L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P40.60.80.120.150.180.240.320.400.500.600.800	50 PCS/BOX

Entry Level TL33-Gold Alumina + Paper Backing

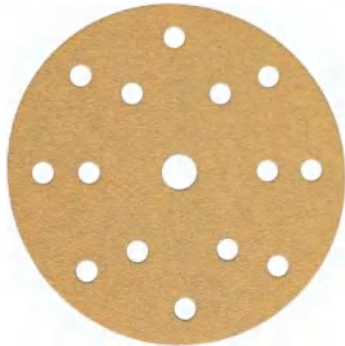


TL338-Alumina Sanding Disc



TL33V-Alumina Sanding Roll



TL33L-Alumina Sanding Strip



Grain: Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Gold
Attachment: Hook&loop Velcro or Pressure-Sensitive Adhesive (PSA) options
Backing: Latex C weight paper
Bonding: Resin over Resin
Hole Pattern: 0-5-6-7-8-9-15-17-hole pattern
Grit: P40 to 800 grit
Coating: Semi open coat


General Sanding
 Universal Function
 Surface Preparation
 Economical Price
 Affordable



TL33 is a general-purpose, lightweight jumbo roll designed for a variety of applications. Suitable for a wide range of materials, including wood, metal, and plastic. Open coat to prevent clogging. Maximum resistance to clogging and loading which increases your productivity and reduced material consumption. Ideal for paint removal, rust removal, and surface conditioning. Provides Exceptional Sanding Performance, so you can get the job done fast, saving you time and money!

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL338	TL338.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P40.60.80.120.150.180.240.320.400.500.600.800	100 PCS/BOX
TL33V	TL33V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL33L	TL33L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P40.60.80.120.150.180.240.320.400.500.600.800	50 PCS/BOX

Superior TL92-Purple Ceramic Grain + Mesh Net

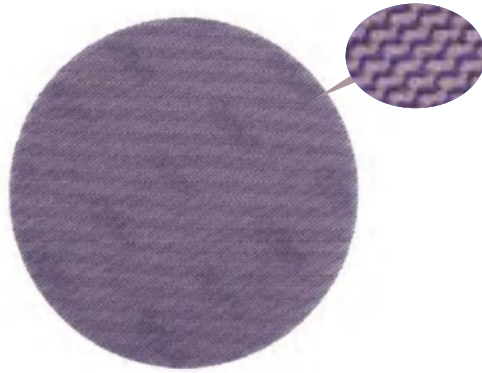


**TL920-Ceramic
Mesh Net Disc**



**TL92V-Ceramic Mesh
Pre-cutted Sanding Roll**




**TL92L-Ceramic
Mesh Strip**



Grain: Ceramic+ Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Purple
Attachment: Hook&loop Velcro for random orbital sanders
Backing: Polyamide fabric
Bonding: Resin over Resin
Grit: P80 to 600 grit
Coating: Open coat


Versatility Sanding Material
 Dust-Free Sanding
 Excellent Durability
 Ceramic Grain
 Environment Friendly




TL92 Mesh disc is ideal for general-purpose sanding across various materials and heavy-duty applications industries, making it a versatile choice. TL92 Mesh disc Suitable for a wide range of materials, including wood, metal, plastic, and composite materials. The net structure prevents clogging and allows for a cleaner work environment. Offers excellent cutting power and durability. Available in a wide range of grit sizes, making it suitable for various sanding tasks. Dust-free sanding characteristics result in a cleaner and healthier work environment.

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL920	TL920.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P60.80.100.120.150.180.240.320.400.500.600.800	50 PCS/BOX
TL92V	TL92V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL92L	TL92L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P60.80.100.120.150.180.240.320.400.500.600.800	50 PCS/BOX

Premuim TL93-Brown Alumina Grain + Mesh Net

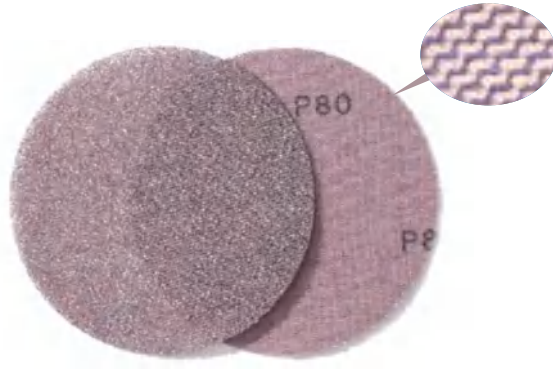



**TL930-Alumina
Mesh Net Disc**

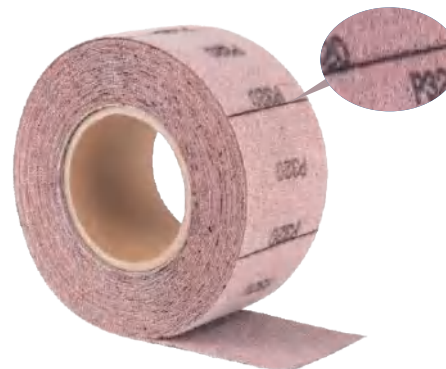

**TL93V-Alumina Mesh
Pre-cutted Sanding Roll**




**TL93L-Alumina
Mesh Strip**



Grain: Aluminum Oxide
Size: 150mm(6 inch) / 125mm(5 inch)
Color: Brown
Attachment: Hook&loop Velcro for random orbital sanders
Backing: Polyamide fabric
Bonding: Resin over Resin
Grit: P80 to 600 grit
Coating: Open coat

Dust-Free Sanding
 Cost-Effective
 Broad Grit Range
 Better working condition



TL93 Mesh disc lasts much longer than traditional paper abrasives and is typically 3 to 5 times more durable than paper discs! This means sanding can be faster, more efficient and less expensive overall. The net structure prevents clogging and allows for a cleaner work environment. TL93 is more affordable than TL92 while still offering high performance. Available in a wide range of grit sizes, making it suitable for various sanding tasks. Improved operator safety and reduced environmental impact. Suitable for a wide range of materials, including wood, metal, plastic, and composite materials.

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL930	TL930.150.0040	Ø 75 / Ø 125 / Ø 150 / Ø 178	P60.80.100.120.150.180.240.320.400.500.600.800	50 PCS/BOX
TL93V	TL93V.070.0080	70mm x 12m / 115mm x 12m	P80.150.180.240.320.400.600	1 PC/BOX
TL93L	TL93L.070.0040	70mm x 125mm / 70mm x 198mm / 70mm x 420mm	P60.80.100.120.150.180.240.320.400.500.600.800	50 PCS/BOX



**TL33F Gold Flex
Pre-cut Roll**



TL33F is a durable product very well suited for sanding at high speeds. Gold is an all-round sanding material that can be used for many purposes. In order to achieve an optimal sanding result, the semi-open grit binding and special stearate coating are designed to prevent clogging and pill forming. Suited for: Automotive/Refinishing/Wood Metal Processing /Marine Industry /Vehicles Manufacturing.

- Grain: Ceramic + Aluminum Oxide
- Size: 115mm*25mm
- Color: Gold
- Backing: Paper backing with foam
- Bonding: Resin over Resin
- Grit: P60 to 800 grit
- Coating: Semi-open coat

- Soft and Flexible Design
- Grip-Friendly Foam Base
- Clog-Resistant Coating
- Versatile Use

Ideal for sanding irregular and detailed surfaces by hand. Foam base ensures a comfortable hold and applies pressure evenly to minimize the risk of sanding through the surface. The special stearate coating prevents dust build-up, ensuring a smooth sanding experience.





MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL33F	TL858.150.0040	115mmx125mmx25m	P60.80.120.180.240.320.400.600.800.1000	1 pcs/box



**TL08 Flexible Wet or Dry
Sanding Foam Disc**




- Grain: Aluminum Oxide
- Color: Sky Blue
- Size: 150mm
- Attachment: Hook&loop Velcro for random orbital sanders
- Backing:Foam+TPU film
- Bonding: Resin over resin
- HolePattern: Multi-hole Pattern
- Grit: P600 to 2000
- Coating: Open Coat

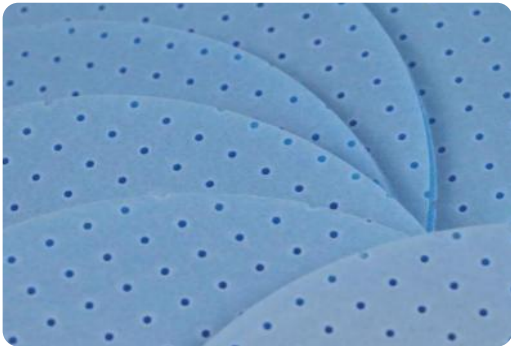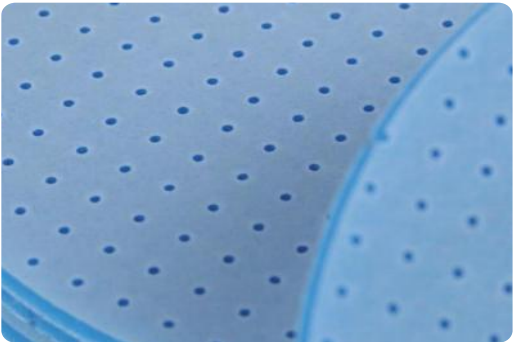

TL08 is designed for versatile blending applications, combining the flexibility of aluminium oxide abrasives with a soft foam backing. These discs provide excellent performance whether used wet or dry, by hand or machine. They are ideal for achieving a clean finish with effective dust and water control.

- Suitable for both wet and dry applications, allowing flexibility in various sanding and blending tasks.
- Soft foam conforms to irregular surfaces, making it comfortable for hand use and effective for achieving an even finish.
- Equipped with hundreds of laser-perforated holes for efficient dust and water extraction, ensuring a cleaner and more controlled working environment.


MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL08	TL080.150.00600	Ø 75/Ø 150	P600.800.1000.1500.2000	20 pcs/box

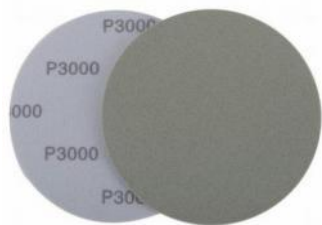

TL68 Trizact Super Fine Wet Polishing Foam Disc

The unique TL68 Trizact 3-dimensional mineral abrasive structures, like pyramids, are uniformly distributed. As they wear, fresh and sharp minerals are exposed, providing a fast and even cut. Suitable for removing fine scratches and preparing surfaces for final polishing, capable of producing scratch-free, high-gloss finishes even on. The foam backing makes the disc flexible and able to conform well to curved and irregular surfaces, ensuring consistent contact and pressure during polishing. Can be used wet or dry. Wet sanding can reduce dust, prolong the disc's life, and minimize loading (clogging) of the abrasive surface.

- Grain: Silicon Carbide
- Color: Blue&Grey
- Size: 75mm, 150mm
- Attachment: Hook&loop Velcro for random orbital sanders
- Attachment: Hook&loop Velcro for random orbital sanders
- Bonding: Resin over Resin
- Vacuum Pattern: No hole, Ideal for wet sanding
- Grit: 2000/2500/3000/5000/8000
- Coating: Open Coat



TL78 Super Flexible Dry Sanding Foam Disc

TL 78 is used for Final sanding step before polishing on high-solid/hard paints, fluorine clear coats, anti-scratch coatings, and aged paints. Surface preparation for topcoat finishing. Used for fine sanding and removing minor scratches without altering the original paint texture. Ideal for achieving a uniform and shallow scratch pattern that is easy to polish out. Minimizes the risk of rework by allowing precise sanding without damaging the original paint texture. The ultra-flexible latex abrasive sheet adapts to curved and complex surfaces, ensuring consistent results.

- Grain: Silicon Carbide
- Color: Milky white
- Size: 150mm
- Attachment: Hook&loop Velcro for random orbital sanders
- Backing: Foam+TPU film
- Bonding: Resin over resin
- Hole Pattern: 181-holes, multi-hole Pattern
- Grit: P240 to 3000
- Coating: Open Coat




TL88 Multi-function Wet or Dry Sanding Foam Disc

TL88 is designed to sand contoured surfaces, corners and sharp edges. Constructed with a fabric face, foam center and grip backing. Openings in fabric allow water, solvent and air to flow freely around the abrasive. Foam center provides even surface pressure that helps eliminate "finger marks" when hand sanding. Designed for optimum performance in both wet and dry sanding. Combines benefits of abrasive cloth and non-woven products. Open cell design holds large amounts of water or solvent for lubrication and cooling.

- Grain: Silicon Carbide
- Color: Black
- Size: 6 inch
- Attachment: Hook&loop Velcro for random orbital sanders
- Backing: Foam
- Bonding: Resin over resin
- Grit: P1000 to P4000

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL68	TL680.150.00320	Ø 75 / Ø 150	P1000.1200.1500.2000.3000.5000.8000	15 PCS/BOX
TL78	TL780.150.00400	Ø 75 / Ø 150	P320.400.600.800.1000.1200.1500.2000.3000	15 PCS/BOX
TL88	TL880.115.00320	Ø 75 / Ø 150	P320.400.600.800.1000.2000.3000	15 PCS/BOX

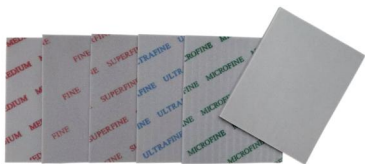**TSS Soft touch sponge Pad**

FlexibleSoft Pads sanding sponges are flexible foam pads that allow you to work hard to reach areas such as headlight openings, areas around door handles and door posts. Helps remove defects, Wet or dry sanding

- Medium - preparation after puttying
- Fine --sanding of electro-dip paint.
- Superfine - sanding primers (difficult areas).
- Ultra fine - sanding primers (difficult areas, critical colours).
- Micro-fine - intermediate sanding of base coat, preparation for dimming (difficult areas).

- Pad size: 140*114 *5 mm
- Packed per 200 pcs

**TSN Soft touch sponge Pad**

FlexibleSoft Pads sanding sponges are flexible foam pads that allow you to work hard to reach areas such as headlight openings, areas around door handles and door posts. Helps remove defects, Wet or dry sanding

- Superfine(P500-P600)
- Ultrafine(P800-P1000)
- Microfine(P1200-1500)

- Packed per 200 pcs
- Pad size: 140*110*5 mm

**TSD Double sided sponge block**

TSD Flex Pad – Versatile & High-Performance solution for sanding workpieces with complex shapes, curves, and contours. Designed for exceptional adaptability without compromising on performance. Thanks to its extra-soft foam carrier material, this pad ensures superior flexibility, enabling smooth sanding on even the most intricate surfaces. Its low clogging properties make it perfect for use on various coatings, including varnishes, fillers, and paints, delivering an even abrasive pattern without the risk of scratching.

- Superfine(P500-P600)
- Ultrafine(P800-P1000)
- Microfine(P1200-1500)

- Packed per 100 pcs
- Pad size: 120 x 98 x 13 mm

**TSF Sponge Block**

Practical multi-purpose product, excellent for roughing and intermediate finishing operations. Intermediate and final finishing of blank wood. Multi-purpose product designed to remove varnish, paint or rust. Can be used on stainless and carbon steel, aluminum, bronze and wrought iron. Preparation of walls and panels, as well as plaster removal

- Fine: grit P240 - P320
- Superfine : grit P500 - P600
- Ultra fine: grit P800-1000


- Packed per 10 pcs
- Pad size: 100*98*13 mm

**TPU80**

Premium waterproof TPU film with industrial grade aluminum oxide (A/O) grain.


Superior strength and durability compared to paper backed sanding discs. Ideal for use on auto body, fiberglass, plastics, composites, marine finishing and high gloss finishing.

Discs are precision stamped and bonded with hook and loop backing. Resin over resin bonding resists heat and humidity.

**TPU83**

The extra stearate coating on TPU discs offers superior lubrication and requires less water than typically used in wet applications. Water misting is more effective than a steady stream. Material released from the disc surface during use is NOT abrasive grain, it is stearate. This coating is designed to slough off gradually while providing close tolerance and a perfectly even surface finish

- Product name:Film Sanding Disc
- Abrasive Grain:Mixes Silicon
- Backing Material:Flexible TPU Film
- Grit:P240-P3000
- Color:Orange
- Usage:Surface Polishing

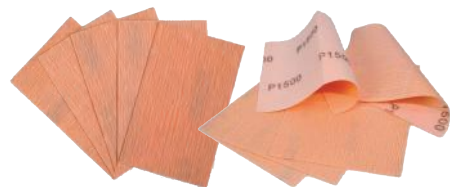**TPU85**

MODEL NO.	ARTICLE NO.	SIZE	GRIT
TPU80	TPU80.150.0040	Ø 75/ Ø 125/ Ø 150	P180.240.320.400.600.800.1000. 1500.2000.2500.3000
TPU83	TPU83.150.0040	Ø 125/ Ø 150	P180.240.320.400.600.800.1000. 1500.2000.2500.3000
TPU85	TPU85.150.0040	70X114mm/130X170mm	P180.240.320.400.600.800.1000. 1500.2000.2500.3000



TL10-Maroon Alumina Non-Woven Scotch Brite



TL20-Grey Silicon Sabide Non-Woven Scotch Brite

Grain: Alumina Oxide
Size: 150mm; 115/152mm x 10/25/50m
Color: Maroon
Backing: Non-Woven Nylon Fabric
Grade: Very fine

- **Multi-Material Compatibility**
- **Resist Tearing**
- **Reusable & Durable**
- **Surface Protection**
- **Dissipate Heating**
- **Wet or Dry**
- **Safety & Cleanliness**

Grain: Silicon Carbide
Size: 150mm; 115/152mm x 10/25/50m
Color: Grey
Backing: Non-Woven Fabric
Grade: Low: Ultra fine

TL10 Alumina Very Fine Scotch Brite & **TL20** Silicon Carbide Ultra Fine Scotch Brite are a industrial hand pad designed for precision cleaning, finishing, and surface conditioning. Non woven pad is ideal for applications like deburring, rust removal, paint prep, and fine finishing, it balances durability with precision for industrial and professional tasks. Suitable for wood, metal, plastics, ceramics, rubber, composites, and more. Aluminum oxide abrasive ensuring fast and uniform finishing. Resists tearing, rusting, and loading (clogging), maintaining performance over extended use. Elastic fibers prevent over-cutting and surface scratches, preserving workpiece dimensions. Open-web design dissipates heat effectively, reducing the risk of workpiece deformation. Can be used dry, with water/solvents, and rinsed for reuse. Folds or shapes easily for curved/irregular surfaces. TL10 Alumina pad cuts faster, TL20 Silicon carbide pad produces a superior surface finish

MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL100	TL100.150.00320	Ø 125 / Ø 150	Very fine	10 PCS/BOX
TL200	TL200.150.00400	Ø 125 / Ø 150	Ultra fine	10 PCS/BOX
TL10R	TL10R.115.00320	115mm×10 M	Very fine	1 PC/BOX
TL20R	TL20R.115.00400	115mm ×10 M	Ultra fine	1 PC/BOX
TL103	TL103.150.00320	150mm×230mm	Very fine	10 PCS/BOX
TL203	TL203.150.00320	150mm×230mm	Ultra fine	10 PCS/BOX



**TL466 MINI PAINT
DEFECT SANDING DISC**



TL466 Spot Repair Disc is made from high quality silicon carbide particles and comes with P2000, P2500, P3000 and P5000 abrasive options to provide an ultra-fine finishing effect. TL466 technology uses microreplicated pyramids. The 3-mil polyester film backing is non-compressible and provides good support to the abrasive, ensuring the disc maintains its shape and performance during use. Produces a finer finish than conventional paper and film-backed abrasives, ideal for achieving a polish-ready surface, especially in automotive paint repair 100 pcs per box.

- Grain: Silicon Carbide
- Color: Green/Grey/Blue
- Attachment: Hook & Loop / PSA
- Backing: PSA+PET FILM
- Bonding: Resin to resin
- Vacuum Pattern: no hole, ideal for wet sanding 500 pcs per roll


APPLY WITH CORDLESS
MINI SANDER P54 TLH68



MODEL NO.	ARTICLE NO.	SIZE	GRIT	PACKING
TL466	TL466.032.02000	Ø 32	P2000	500discs/roll
TL466	TL466.032.02500	Ø 32	P2500	500discs/roll
TL466	TL466.032.03000	Ø 32	P3000	500discs/roll
TL466	TL466.032.05000	Ø 32	P5000	500discs/roll
466BLOCK	TL2209.032.02000	55mm×30mm	/	1 block/pack
466BLOCK	TL2209.032.02500	55mm×30mm	/	1 block/pack
466BLOCK	TL2209.032.03000	55mm×30mm	/	1 block/pack
466BLOCK	TL2209.032.05000	55mm×30mm	/	1 block/pack



MASKING PRODUCTS

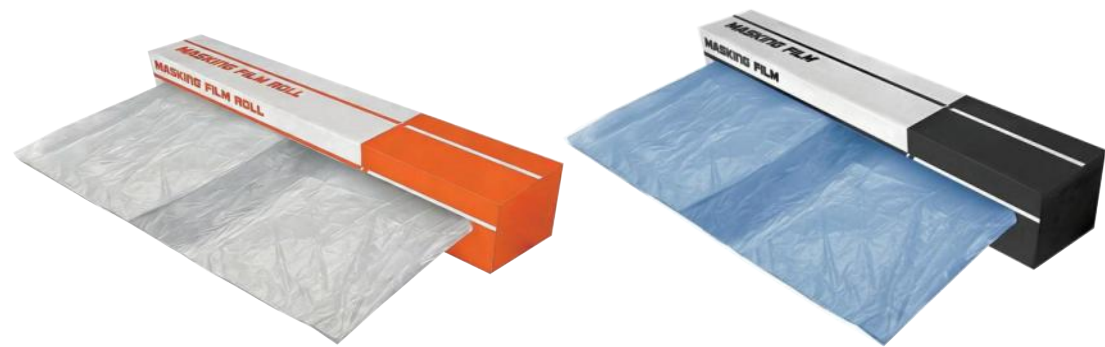

HDPE Spraying Masking Film



High-density, tear-resistant, durable polyethylene sheeting/film masks car from paint overspray and other contaminants during repairs.

The film is easy to handle so one person can quickly cover the vehicle.

The film is easy to cut so the required area can be removed with maximum speed and accuracy.

CoronaTreated to ensure maximum overspray adhesion so flecks don't contaminate fresh paint.

Thickness:8/9/10/11 microns available




ARTICLE NO.	SIZE	PACKING
MF502W	4*150m	1 roll/box
MF502W	5*120m	1 roll/box
MF502W	4*300m	1 roll/box
MF502W	6*100m	1 roll/box
MF503B	4*150m	1 roll/box
MF502B	5*120m	1 roll/box
MF502B	4*300m	1 roll/box
MF502B	6*100m	1 roll/box

MFS02 WHITE



MFS03 BLUE

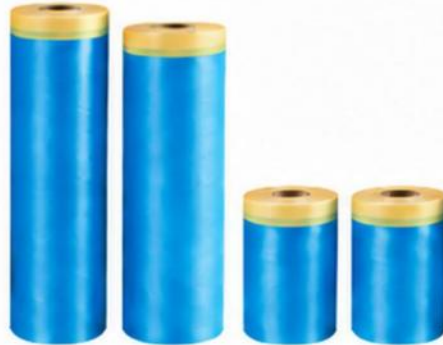

PRODUCT DESCRIPTION

- High density polyethylene masking film
- Premium high tack 18mm masking tape attached to a high-density 8-micron protective film
- Excellent resistance to paints, varnishes and solvents; ideal cover for masked areas
- Excellent adhesion offers good mechanical strength
- Easy clean removal leaves no residue
- Solvent resistant to paint and will not bleed through

FEATURES

- Easy roll release with static cling for complete surface protection and easy application
- Lightweight and tear resistant
- Protect large areas from paint, overspray and dust
- Use for any paint or coating application
- Temperature resistance: 80°C



KEY FEATURES



PAINT & SOLVENT
RESISTANT



TEMPERATURE
RESISTANCE
80°C



18mm HIGH TACK
MASKING TAPE



STATIC CLING
PROTECTION



LIGHTWEIGHT
& TEAR
RESISTANT



CLEAN REMOVAL
NO RESIDUE

SIZE INFORMATION


MODEL	AVAILABLE SIZES				
MFS02 WHITE	35cm × 25m	60cm × 25m	90cm × 25m	120cm × 25m	180cm × 25m
MFS03 BLUE	35cm × 25m	60cm × 25m	90cm × 25m	120cm × 25m	180cm × 25m

PACKING INFORMATION

SIZE	PACKING
35cm × 25m	100 rolls/box
60cm × 25m	50 rolls/box
90cm × 25m	50 rolls/box
120cm × 25m	50 rolls/box
180cm × 25m	50 rolls/box



MT80 General Purpose MaskingTape

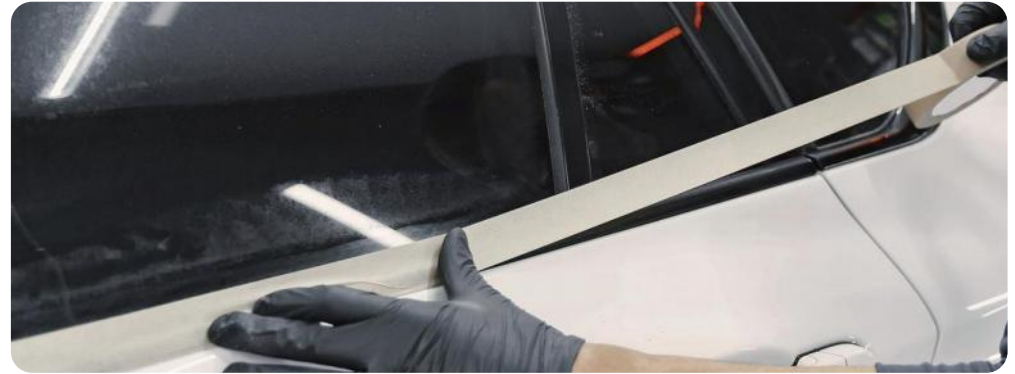

Features & Benefits

- Medium adhesion on painted metal, rubber, glass or chrome parts.
 - Good holding power
 - Clean removal
 - Suitable for most common water and solvent base paints
 - Molds perfectly to contours, whether working with masking paper or film
- Recommended for indoor operations

Your all-purpose solution for general masking and repair jobs

- MT80 CarBasic Masking Tape—the go-to for automotive repairs. Crafted for precision in bodyshops, it features a crepe paper backing and a balanced adhesive for strong hold.
- Ideal for masking curved profiles or using along with paper and film, it consistently delivers top-notch results. Even under drying cycles at temperatures up to 80°C/176°F for 30 minutes, this tape ensures professional results.

Temp.
Resistance



80°C
30min

Available
Colour



White

Product Reference

Part	Size	Pcs/Case	Box/Pallet
MT8048	48mmx50m	18 rolls/case	120 boxes/pallet
MT8036	36mmx50m	24 rolls/case	120 boxes/pallet
MT8024	24mmx50m	36 rolls/case	120 boxes/pallet
MT8018	18mmx50m	48 rolls/case	120 boxes/pallet

Technical Data

Backing	Adhesive	Total Thickness	Tensile Strength	Adhesion to Steel	Elongation
Crepe Paper	Natural / Synthetic Rubber	150µm	65N/25cm	6N/25MM	10% at break

MT90 Premium Spraying Masking Tape



**MT90
Masking Tape**



Features & Benefits

- Good holding power
- Crepe paper masking tape with a rubber-based adhesive layer.
- Temperature resistant up to 90°C for a maximum of 1 hour.
- Excellent adhesion.
- UV resistant for up to 3 days. Solvent resistant.

Your all-purpose solution for general masking and repair jobs

- MT90 CarBasic Masking Tape—thego-to for automotive repairs.Crafted for precision in bodyshops,it features a crepe paper backing and a balanced adhesive for strong hold.
- Ideal for masking curved profiles or using along with paper and film,it consistently delivers top-notch results.Even under drying cycles at temperatures up to 90°C/194°F for an hour,this tape ensures professional results.

Temp.
Resistance



90°C
60 min

80°C
60min

Available
Colour



Light Orange

Product Reference

Part	Size	Pcs/Case	Box/Pallet
MT9048	48mmx50m	18 rolls/case	120 boxes/pallet
MT9036	36mmx50m	24 rolls/case	120 boxes/pallet
MT9024	24mmx50m	36 rolls/case	120 boxes/pallet
MT9018	18mmx50m	48 rolls/case	120 boxes/pallet

Technical Data

Backing	Adhesive	Total Thickness	Tensile Strength	Adhesion to Steel	Elongation
Crepe Paper	Natural / SyntheticRubber	150µm	65N/25cm	6N/25MM	10% at break



**MT110 Wet Sanding
MaskingTape**



Features & Benefits

- Conforms well to curved and irregular surfaces without lifting or tearing.
- Thin backing designed to leave low profile paint edges and to better work around corners delivering sharp and clean paint edges.
- UV resistance up to 7 days.
- Specially formulated adhesive for clean and easy one piece removal.
- Performs at high temperatures up to 110° C (30 min.)
- Solvent & Waterborne paints compatible.

Instant adhesion, sharp edges, conforms to all surfaces

- MT110 Premium Masking Tape has been engineered to perform and deliver results under the most demanding conditions.
- The advanced rubber-based adhesive formulation offers high adhesion and strong holding power without leaving residue when removed from the surface.
- The product has been improved to 7 days UV resistance.
- Thanks to its balanced construction, MT110 Masking Tape will deliver consistent unwinding, easy tearing and precise conformability while performing extremely well when used tape-on-tape.
- Brilliant translucent color allows to see through the tape for better masking lines and for superior visibility of masked areas.

Temp.
Resistance  110°C 30min

Available
Colour  Yellow
 Green

Product Reference


Part	Size	Pcs/Case	Box/Pallet
MT11048	48mmx50m	18 rolls/case	120 boxes/pallet
MT11036	36mmx50m	24 rolls/case	120 boxes/pallet
MT11024	24mmx50m	36 rolls/case	120 boxes/pallet
MT11018	18mmx50m	48 rolls/case	120 boxes/pallet

Technical Data

Backing	Adhesive	Total Thickness	Tensile Strength	Adhesion to Steel	Elongation
Crepe Paper	Natural / SyntheticRubber	145µm	70N/25MM	6.5N/25mm	12% at break



MT1203 ORANGE
High performance Masking Tape

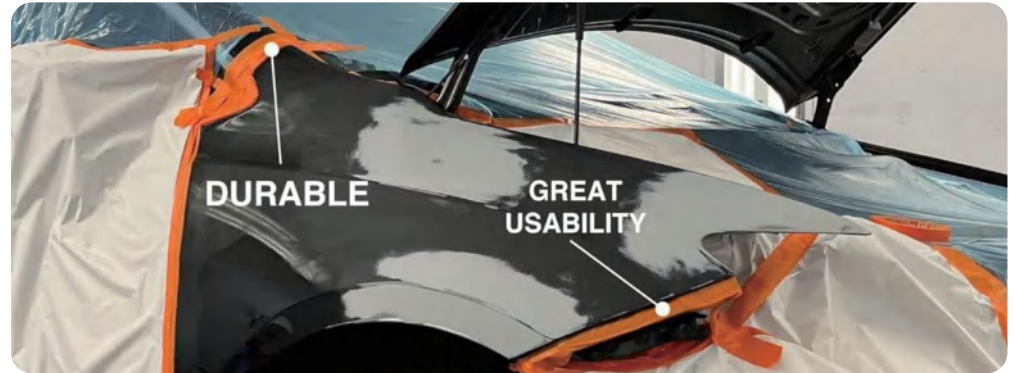

Features & Benefits

- Temperature Resistance up to 120°C/248°F (30 min.)
- Conforms well to curved surfaces without lifting or tearing
- Compatible with waterborne, solvent-based and polyurethane coatings
- Easy clean removal without adhesive residues
- Excellent resistance to slivering
- Excellent conformability on irregular surfaces
- 7 days UV resistance for outdoor operation

Elevating Collision Repair Excellence

- Tmiles High performance Orange Masking Tape is designed for critical masking applications in the collision repair industry.
- It offers seamless workflow with reliable unwinding and consistent adherence even in challenging conditions.
- Withstanding temperatures up to 120°C/248°F, it ensures enduring performance during drying cycles
- The thicker crepe-paper build allows for exceptional conformability, guaranteeing flawless masking of every surface.
- Tmiles 1203 Masking Tape is ideal choice for professionals who demand excellence.

**Temp.
Resistance**



120°C
30 min | 80°C
60 min

**Available
Colour**

- Orange
- Yellow
- Green

Product Reference

Part	Size	Pcs/Case	Box/Pallet
MT120348	48mmx50m	18 rolls/case	72 boxes/pallet
MT120336	36mmx50m	24 rolls/case	96 boxes/pallet
MT120324	24mmx50m	36 rolls/case	96 boxes/pallet
MT120318	18mmx50m	48 rolls/case	96 boxes/pallet

Technical Data

Backing	Adhesive	Total Thickness	Tensile Strength	Adhesion to Steel	Elongation
Crepe Paper	Water-based acrylic adhesive	135µm	70N/25MM	3.5N/25MM	10% at break

MT68 Precision Line Washi Masking Tape



**MT68 Apple
Green Washi Masking Tape**



Features & Benefits

- Excellent adhesion to tape on tape and with masking paper and protective film.
- Thin backing designed to leave low profile paint edges and to better work around corners delivering sharp and clean paint edges
- UV resistance up to 30 days
- Specially formulated adhesive for clean and easy one piece removal
- Performs at high temperatures up to 100° C (30 min.)
- Solvent & Waterborne paints compatible

Temp.
Resistance  100°C 30 min

Available
Colour  Apple Green

The product has been improved to 7 days UV resistance and good for wet sanding

- MT68 Masking Tape is made with apple green washi paper specific for automotive car painting application during drying cycles at high temperatures up to 100°C This painters tape guarantees high adhesion and doesn't leave adhesive traces when removed.
- This Masking Tape will deliver consistent unwinding, easy tearing and precise conformability while performing extremely well when used tape-on-tape. This painters tape can be applied to areas such as windows, trims, door handles, mirrors, and headlights to shield them from paint or chemical exposure.

Product Reference

Part	Size	Pcs/Case	Box/Pallet
MT6848	48mmx50m	20 rolls/case	120 boxes/pallet
MT6836	36mmx50m	24 rolls/case	120 boxes/pallet
MT6824	24mmx50m	36 rolls/case	120 boxes/pallet
MT6850	18mmx50m	48 rolls/case	120 boxes/pallet

Technical Data

Backing	Adhesive	Total Thickness	Tensile Strength	Adhesion to Steel	Elongation
Washi Paper	Water-based acrylic adhesive	100µm	70 N/25mm	3.5N/25mm	6% at break

MT6737 BLUE



MT6738 GREEN



PRODUCT DESCRIPTION

- Soft matte PVC film backing
- Rubber-based pressure-sensitive adhesive
- Medium adhesion with excellent flexibility
- Clean removal with low residue risk
- Suitable for precision masking, fine lines and positioning applications
- RoHS compliant

FEATURES

Excellent conformability for curves and contours
Suitable for automotive fine line masking and surface protection
Good tensile strength and stretch performance
Paint and solvent resistant
Temperature resistance: 150°C × 1 hour
Short-term heat resistance up to 180°C

KEY FEATURES



FINE LINE MASKING



HIGH Flexibility



HEAT RESISTANCE



CLEAN REMOVAL



PAINT & SOLVENT RESISTANT



POSITIONING MARKING

SIZE INFORMATION

MODEL	AVAILABLE SIZES
MT6737 BLUE	3×33mm, 6×33mm, 9×33mm, 12×33mm, 3×55mm, 6×55mm, 9×55mm, 12×55mm, 19×55mm
MT6738 GREEN	3×33mm, 6×33mm, 9×33mm, 12×33mm, 3×55mm, 6×55mm, 9×55mm, 12×55mm, 19×55mm

TECHNICAL INFORMATION

PROPERTY	VALUE
Thickness	0.13 mm
Elongation	150 %
Adhesion	1.8 Kg/10mm
Heat Resistance	150°C 1 hour
Adhesive	Rubber-based adhesive
Base Material	Soft PVC film



MT662 DUCT TAPE

Professional quality cloth tape with strong adhesion and excellent tensile strength. Provides a solvent free, pressure sensitive adhesion on a variety of surfaces. Heavy duty, multi-purpose tape that provides a durable and waterproof repair, a reliable solution for many applications. Easy to tear by hand, allowing for quick and efficient use.

ARTICLE NO.	SIZE	PACKING
MT-662	50mm×50M	18 pcs/cart



MT6792 Perforated Trim Tape

Perforated Trim Masking Tape is specially designed for auto spray painting masking protection of automotive aftermarket maintenance and repair. The perforated design on the tape allows to tear easily by hand without tools and the trim masking tape has a rigid band at the edge which can be slightly lifted and insert into the concealed paint edges of the trim.

ARTICLE NO.	SIZE	PACKING
MT6757	50.8mm x 10m	18pcs/cart



MTF402 FOAM TAPE

Professional foam masking tape for insulation of gaps. Made out of special foam material that prevents formation of hard paint edges during the painting jobs. Classic shape ensures a very easy and complete application. Does not leave residues. Temperature resistant up to 80° C.

ARTICLE NO.	SIZE	PACKING
MTF402	13mm×50M	Dispenser box





MT668 WHEEL COVER PLASTIC

Disposable transparent wheel cover for protecting tyres and wheels from paint overspray, dust and dirt during repair and refinishing work. Quick to install and remove, ideal for body shops and workshop protection.

MODEL: MT668
PACKING: 1 roll / 250 pcs per box



MT671 TYRE COVERS FOR PAINTING

Elastic protective film designed to isolate the tyre during wheel rim painting. Helps keep paint off the tyre, fits most wheel sizes, and improves masking efficiency during refinishing operations.

- Easy to fit around the wheel
- Suitable for rim painting protection
- Clean and time-saving solution

MODEL: MT671
SIZE: 145 cm × 20 mic
PACKING: 20 pcs per box




MT672 PLASTIC SEAT COVER

Disposable plastic seat cover that protects car seats from paint, dust, oil and dirt during repair, detailing and workshop operations. Easy to install, hygienic and convenient to use.

- Fast installation
- Water and dust protection
- Disposable and hygienic

MODEL: MT672
SIZE: 80 cm × 130 cm
PACKING: 250 pcs per box

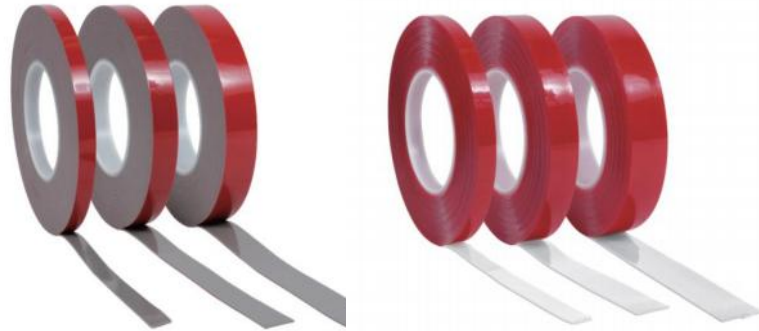

HB3110
Double Sided Acrylic Tape



Powerful Adhesion: Boasts a robust adhesive force, ensuring firm bonding.

- High - Performance Reinforced Acrylic Adhesive: Utilizes a high - strength, top - performing reinforced acrylic adhesive for reliable sticking power.
- Closed - Cell Foam Structure: Constructed with a closed - cell foam design, providing unique properties.
- Outstanding Temperature Resistance: Can withstand a wide temperature range, from -20°C to 150°C.

● The Grey Double-Sided Acrylic Tape is a multi-purpose, high-quality mounting tape that works well in any environment.

● It is ideal for:

- License plates
- Plastic trims/panels
- Metal materials
- Body moldings
- Emblems

- Carrier: Acrylic Foam
- Adhesive : Solvent - based Acrylic Adhesive
- Color: Grey (with Red/Green HDPE Release Liner)
- Thickness: 1.10mm (±0.10mm)
- Width: 3mm, 6mm, 9mm, 12mm, 19mm, 25mm (±5%)
- Length: Standard length is 10m (±0.2m)

The high-end Double-Sided Acrylic Tape is a 1.1mm thick closed-cell foam tape made of reinforced acrylic material. It features a high-tack, high-performance acrylic adhesive that delivers exceptional strength. Thanks to its closed-cell foam structure, this tape is perfectly suited for both indoor and outdoor fixing applications, capable of withstanding all kinds of weather conditions.

As a heavy-duty double-sided tape designed for automotive use, it can easily bond and mount various materials with such strong adhesion that the bonded items stay firmly in place. What's more, even though the adhesive boasts high strength, the tape can be removed without leaving any tough, hard-to-clean residue.

This tape exhibits excellent bonding performance on a broad spectrum of substrates, including plastics and metals. It is particularly ideal for bonding emblems, nameplates, plastic panels, and metal components.



Model & Color

METRIC

IMPERIAL

HB3110-GERY

HB3110-CLEAR

6mm x 10m

1/4" x 33'

12mm x 10m

1/2" x 33'

19mm x 10m

3/4" x 33'

22mm x 10m

7/8" x 33'

25mm x 10m

1" x 33'



TREW Rubber Eraser Wheel with Drill Adapter



TREW Rubber Eraser Wheel quickly removes adhesives and decals on Car, Auto, Boat, RV & Signs. Rubber Eraser Wheel with Drill Adapter scrubs off the stripes and decals with friction instead of abrasives, preventing scratching and other damage to the substrate surface below them. The eraser wheel's alternating slotted tooth edge design allows it to dissipate the heat better under high-speed friction, enabling the wheel to remove material from substrates easier, faster, and safer. It will not gouge or scratch cured acrylic enamel or urethane paint. Do not use the wheel on lacquer coatings.

- Type: Heavy duty rubber eraser wheel
- Size: 100 * 100 * 15/20/25 mm
- Material: Rubber
- Max Rotational Speed: 4000RPM
- Color: Light yellow
- Weight: 200/215/230gm

Rubber Eraser Wheel with Drill Adapter scrubs off the stripes and decals with friction instead of abrasives, preventing scratching and other damage to the substrate surface below them. The eraser wheel's alternating slotted tooth edge design allows it to dissipate the heat better under high-speed friction, enabling the wheel to remove material from substrates easier, faster, and safer. Do not use the wheel on lacquer coatings. It comes with a drill arbor attachment that mounts on the threads of the eraser wheel. The wheel can be used at a maximum of 4,000 rpm, but works best between 1,500 to 3,000 rpm.

Art No	Type	Thickness	Diameter	Weight
TREW10015	Flat	15mm	100mm	215g
TREW10020	Slotted	20mm	100mm	200g
TREW10025	Slotted	25mm	100mm	230g





PAINT **PREPARATION** PRODUCTS

TM6057

PPS 1.0 PAINTING CUP KIT

AVAILABLE SIZES

180 mL
400 mL
600 mL
800 mL



KEY FEATURES

- High transparency cup for easy mixing and visibility.
- Accurate printed scales for precise mixing ratios.
- Strong outer cup with tight collar lock.
- Leak-resistant lid and 125/190 μ FILTER.
- Ideal for painting and mixing.

CUP SYSTEM KITS



WORKS WITH ALL TYPES OF PAINT

- Basecoats
- Clearcoats
- Primers
- Topcoats
- Sealers
- Gelcoats

AVAILABLE ADAPTERS



ADAPTER CODE	COMPATIBLE SPRAY GUN MODELS	QTY / BOX
MT-A01	M16 $\times$ 1.5 Female, Sata RNR92-95 / Iwata W400	1
MT-A02	SATA Mini QCC, Sata Mini Jet 4600 / 5500	1
MT-A03	Sata QCC, Sata 3000/4000/5000	1
MT-A04	G1/4 BSP Male, Iwata WS400 / LS400	1
MT-A05	M12 $\times$ 1.0 male, Walcom GEO / Slim	1
MT-A06	M16 $\times$ 1.5 Male, Walcom GEO / HTE/SATA JET	1
MT-A07	3/8 BSP Male, DevilBiss GTI / DVI	1
MT-A08	M18 $\times$ 1.5 Female, Sagola Xtreme 4400 / 4500 / 4600	1
MT-A09	M12 $\times$ 1.5 Male, Sagola 3300 / Mini Xtreme	1
MT-A10	M14 $\times$ 1.0 Male, Mini Spray GUN/ ITACLO MINI	1

MODEL	VOLUME	DIMENSIONS (cm)			WEIGHT (kgs)		PACKING CONTENTS
		L	W	H	G.W.	N.W.	
TM6057-180mL	180 mL	34	21	14	1.2	1.0	50 Liners + 50 Lids with 125/190 μ FILTER+ 20 Plugs + 1 Outer Cup per Box
TM6057-400mL	400 mL	38	26	18	1.5	1.2	
TM6057-600mL	600 mL	36	33	22	2.1	1.7	
TM6057-800mL	800 mL	41	42	31	2.3	1.8	



TM6053 Plastic Paint mixing Cups

- These disposable mixing cups are perfect for automotive paints, epoxy resin pours, and acrylic pouring paint stains. Durable and they handle all types of paints, solvents and liquids.
- Accurate & Easy Mixing-Multiple Ratios Included- Each epoxy cup features graduated measurements with popular mix ratios (1:1, 2:1, 3:1, 4:1, 6:1,8:1) for precise and hassle-free mixing.Perfect for mixing epoxy resin,paints,andstains.
- Durable & Reusable Polypropylene Plastic (PP)-Made from high-quality PP .

Size: 400ML/600ML/1400ML/2300ML



TM6013 Plastic Paint mixing Cups

Polypropylene Plastic Paint Measuring Cups.

These 600 ML transparent plastic beaker cups are made from top-quality material, suitable for mixing and measuring solvent and water-based materials. They are also clearly marked with various numerical indicators that assist you in measuring the precise amount of paint or any other material you require.The clear plastic mixing cups can hold 600 ml of material in volume, they have a very smooth texture on the inside, which makes it especiallyideal for mixing.

Size: 550/600/1000ML

Color: Red/blue



TM6035 Plastic paint Mixing Pot

Plastic Mixing Pot & Lid For Automotive Refinish.

Made from durable, lightweight materials, often polypropylene (PP) or PET plastic. Feature screw-top lids designed to create a secure, airtight, and leak-proof seal, preserving contents and preventing contamination. The wide-mouth design facilitates easy filling, scooping, and cleaning. Suitable for a variety of uses including food storage (such as ice cream or dry goods), cosmetics, pharmaceuticals, and industrial applications like paint mixing.

Sizes available:200ml/300ml/500ml/1000ml/2000ml



TM6025 Metal paint Pot

Ideal for storing, transporting and decanting liquids with aggressive properties including industry applications such as adhesives, solvents, varnishes, paints and chemicals.

High usage in paint industry for holding solvents, paints, liquids. Perfect for decanting and storage due to its strong tin composition.

Sizes available: 250ml, 500ml, 1 litre, 2.5 litre, 5 litre



TL6052 PAINT STRAINERS

- High performance cone shaped paint strainers that eliminate dirt, dust, particulates, lumps or any debris that can affect your paint job by clogging your spray gun, airless sprayer or paint brush.
- Material: Paper & Nylon. Bottom made of premium durable lint free nylon mesh. Easy to filter impurities.
- **【Versatile Paint Strainer】**: Keeps paint clean and prevents clogging for use in a sprayer by removing unwanted dust, particles, paint clumps, solids, and other impurities in new or old latex or oil based paints and products; For all types of paints, varnishes, resins, and stains,
- Even use to strain automotive antifreeze, oil, loose leaf tea, and more.

ARTICLE NO.	SIZE	PACKING
TM6052A	190µm	1000 pcs/cart
TM6052B	125µm	1000 pcs/cart



TL6058 FILM/PAPER CUTTER/APPLICATION/USE

- Cut the masking film according to different vehicle shapes
 - Carefully cut masking film without damaging it
- TECHNICAL SPECIFICATIONS
- Model: MT6058
 - Body: Plastic
 - Colour: Red
 - Blade: Stainless steel
 - Attached magnet
 - Size: 10cm x 5.8cm

Colour:



Red



Blue



Black

ARTICLE NO.	SIZE	PACKING
TM6058A	10×5.8cm	500
TM6058B	10×5.8cm	500



TM6059 Body Filler Spreaders

- The body filler spreaders are sufficient to meet your various applying needs. The practical body filler spreaders are reliable tools for a large range of auto body filling projects using fillers, glazes, putties and caulks. Also great for spreading Epoxy Resin pours on Canvas and Wood working panels. The flexible edge design of this auto body spreader is suitable for the repair work of most parts of the car body. Flexible edges make applying, spreading and shaping fast and easy.
- Model: MT6079
- Body: Plastic
- Colour: Yellow
- Size: 3" x 4" 3" x 5" 4" x 6"

ARTICLE NO.	SIZE	PACKING
TM6059A	3" X 4"	1000 pcs/cart
TM6059B	3" X 5"	1000 pcs/cart
TM6059C	4" X 6"	1000 pcs/cart



TM650

White Oil Absorbent Wiper Roll

High-absorbency industrial wiping roll for degreasing and general cleaning.

Soft, durable, low lint.

Available in white.

Material

55% Cellulose + 45% Polyester Fiber

Size 25 × 38 CM

Packing 500 PCS / ROLL



TM660

Blue Oil Absorbent Wiper Roll

High-absorbency wiper roll for oil, grease, and solvent-based cleaning.

Strong absorption, durable, and low lint.

Material

PP (Polypropylene)

Size 25 × 38 CM

Packing 500 PCS / ROLL



TM662

Blue Oil Absorbent Wiper Sheet

PP (polypropylene) absorbent cleaning sheets for workshop and maintenance use.

Soft, durable, and efficient for wiping oil and dirt.

Material

PP (Polypropylene)

Size 30 × 30 CM

Packing 150 PCS / BAG



TOOLS & ACCESSORIES

400W Brushless RANDOM Orbital Sander

Ergonomic Design:

Reduces fatigue during overhead and extended sanding tasks.

Brushless Motor:

Stepless speed pre - selection with constant speed under load.



TA8828 Brushless Random Orbital Electric Sander Machine

- The TA8828 Brushless Random Orbital Electric Sander Machine is meticulously crafted for hand sanding operations. Its design is focused on minimizing operator fatigue, especially during overhead sanding tasks, thereby increasing productivity. The sander offers a seamless and comfortable operation at edges and in various working positions, thanks to its ergonomic build.
- With a brushless motor, it has stepless speed pre - selection for consistent sanding under load. The 5 - mm sanding stroke aids efficient material removal. Its compact design, optimized weight, and vibration control system make operation comfortable and suitable for fine sanding.

Key Features

- Ergonomic Design: Reduces fatigue during overhead and extended sanding tasks.
- Brushless Motor: Stepless speed pre - selection with constant speed under load.
- Efficient Sanding Stroke: 5 - mm stroke for effective material removal.
- Vibration Control: Ensures smoother operation and less fatigue.

Product Parameters

- Pad Size: 150 mm (6 inches)
- Voltage Frequency: 220 - 240V~50/60Hz
- Rated Input Power: 400W
- Eccentric Motion Speed: 6000 - 10000/min
- Net Weight: 1.2 kg
- Orbit Size: 3mm/5mm



TA8838 70*400MM Orbital Sander

Ergonomic Design:

Reduces fatigue during overhead and extended sanding tasks.

Long-Life Motor:

Configured with a long-life motor and carbon brush for stable speed output under load.



TA8838 Random Orbital Electric Sander Machine



Product Introduction

The TA8838 random orbital sander is engineered for efficient sanding on large surfaces. Its ergonomic design reduces operator fatigue, while the powerful motor with carbon brush delivers stable speed output under load. The machine features smooth operation, effective dust extraction, and precise sanding results.



Key Features

- Large sanding surface increases working efficiency
- Powerful motor with carbon brush for stable speed output
- Speed control for optimal performance on various materials
- Soft-start design reduces vibration at startup
- Built-in speed stabilizer maintains constant output
- Finger-controlled trigger for precise speed adjustment
- Long-life motor and carbon brush design
- Ergonomic body design for comfortable handling
- Efficient dust extraction keeps the work area clean



Product Parameters

- Orbit: 5mm / 3-3/16"
- Pad Size: 80 x 400mm
- Holes: Multihole
- Rated Input Power: 800W
- No Load Speed: 4000-7000 RPM
- Speed Control: ✓
- Paper Clips: ✓
- Dust Extraction Connection Dia: 1-1/16" (27mm)
- Net Weight: 2.9kg / 6.39 lbs

Cordless Mini Repair Sander



**TLH68 CORDLESS
Mini Paint Defect Sander**



- **32mm 12 Volt Lithium-Ion Portable Mini Spot Repair Sander**
The compact, cordless spot sander is designed for precision work and professional results. Ideal for tackling small, intricate areas such as headlights, mirror housings, bumpers, pillars, and touch-up zones
- **Characteristics:**
Long-life Brushless motor, with easy product maintenance
6 speed levels (4000-10000/min), with speed memory function, convenient and intelligent
Low noise to provide more comfortable work
Lightweight, slim and compact design, comfortable to hold to reduce fatigue when working for long periods
Standard 1/4"-20 threaded backing plate, PSA or VELCRO mounting
Integrated control panel, for managing the power switch, charge and speed indicator and speed control button.
Used with TMILES TL466 Abrasives to get the best surface finishing result.

- **Protection Class:II**
- **Size:1-1/4" (32mm)**
- **Charger Voltage:110-120V or 220-240V**
- **Battery:12V and 2.5A**
- **Charging Time from 0-1:About 80 mins**
- **Battery Life from 1-0:About 40 mins**
- **Power:75W**
- **Sound Level:<68dBa**
- **7-Level Adjustable Free Speed:4,000RPM,5,000RPM,6,000RPM, 6,500RPM,7,000RPM,7,500RPM,8000 RPM**
- **Orbit:3mm**
- **Backup Pad:30mm PSA Type with Female Thread 1/4"**
- **Net Weight with Pad:0.4kg**
- **Gross weight with packing set:1.4kg**
- **Packing:1 Set=1 Sander+2 Batteries+1 Charger+1 Pad**
1 Carton=8 Sets=35x25x27cm=G.W 9.0kg



TA8827 Pneumatic Orbital Sander

- The TA8827 Pneumatic Orbital Sander is engineered to meet the demands of users who prioritize speed and precision in their sanding tasks. Boasting a speed range of 0 - 10,000 revolutions per minute (RPM), it delivers a swift and efficient sanding performance, making it ideal for projects that require both accuracy and rapid progress.
- Its state - of - the - art dust collection system is a standout feature. By effectively collecting dust at the source, it maintains a clean working environment, which is not only beneficial for the operator's health but also crucial for achieving high - quality sanding results without the interference of dust particles.

Key Features

- High - Speed Operation: With a maximum speed of 12,000 RPM, it ensures quick material removal and efficient surface finishing.
- Advanced Dust Extraction: The central dust collection mechanism keeps the workspace free from dust, enhancing both hygiene and work quality.

Product Parameters

- Pad Dimensions: 125mm (5"); 150mm (6")
- Rotational Speed: 12000 RPM
- Weight: 1.2 kg
- Working Air Pressure: 6.3 bar



LIGHT WEIGHT DESIGN

● ● ●
LIGHTWEIGHT
DESIGN



HIGH HARDNESS

● ● ●
HIGH HARDNESS
GEAR



ALL COOPER MOTOR

● ● ●
ALL COPPER
MOTOR



TA8830 DUAL ACTION ELECTRIC POLISHER

- The TA8830 Dual Action Electric Polisher is a paragon of ergonomic design and high - quality construction. Crafted from premium plastics, it offers a comfortable and intuitive user experience while minimizing vibration and noise during operation. This polisher is designed to deliver smooth and even polishing and waxing, ensuring that the painted surface remains unharmed.
- With six adjustable speeds, it caters to a wide range of tasks. Speeds 1 - 2 are ideal for low - speed grinding, while speeds 3 - 4 are suitable for high - speed grinding, giving users the flexibility to choose the right speed for their specific needs. Its random orbital movement, with orbit sizes of 15mm or 21mm, protects the painted surface from overheating and leaves a flawless, glossy finish free from holograms and swirl marks.

Key Features

- Ergonomic Design: Reduces vibration and noise for comfortable use.
- Safe Polishing: Protects painted surfaces during use.
- Variable Speeds: Six speeds for different grinding and polishing tasks.
- Orbital Movement: 15mm/21mm orbit size for even polishing.

Product Parameters

- Pad Size: 125mm (5 inches)/150mm (6 inches)
- Voltage Frequency: 220 - 240V~50/60Hz
- Rated Input Power: 1250W
- No - load Speed: 700 - 3800/min
- Weight: 2.66 kg
- Orbit Size: 15mm/21mm



TM501

3 inch 0 hole Grip Backup Pad for Pneumatic Sander

Maximum Speed 10,000 RPM;Medium density
5/16"-24 (M8)Screw Thread
Compatible with sanding papers and polishing pads
using hook and loop style accessories.



TM5011

3 inch hook and loop soft interface pad

Use with TM501 75mm Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut
and closer edge sanding.



TM502

75mm Grip Backup Pad

3 inch 6 hole Grip Backup Pad for Pneumatic Sander
Maximum Speed 12,000 RPM;Medium density
5/16"-24 (M8)Screw Thread
Compatible with Dynabrade 57126 and Mirka
DEROS



TM5012

3 inch hook and loop soft interface pad

Use with TM502 75mm Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut
and closer edge sanding.



TM503

6 inch 15 hole Grip Backup Pad for Pneumatic Sander


Maximum Speed 12,000 RPM;Medium or soft
density;15 Hole Dust Extraction in medium or soft
density;5/16"-24 (M8)Screw Thread
Compatible with sanding papers and polishing pads
using hook and loop style accessories.



TM5013

6 inch hook and loop soft interface pad

Use with TM503 150mm Back up pad
Thickness 5mm
Adds support to disc pad for improved abrasive cut
and closer edge sanding.



TM507

6 inch 48 hole Grip Backup Pad for both Pneumatic and Electric Sander

Maximum Speed 13,000 RPM;Medium density;48 Hole
Dust Extraction;5/16" x 24 male thread
attachment;Compatible with 6" size grip hook & loop
sanding and Mirka 's Net Sanding dust extraction
system.



TM5017

6 inch muliti hole hook and loop soft interface pad


Use with TM507 150mm Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut
and closer edge sanding.



TM2060

6 inch 49 hole Grip Backup Pad for Festool Electric Sander

Maximum Speed 12000 RPM;
Weight 130g
Hard or Soft density;
49 Hole Dust Extraction
M8 thread attachment
The sanding pad fits Festool 150/3 EQ, 150/5 EQ, EC 150/3 EQ, EC 150/5 EQ grinder accessories.



TM520

6 inch 52 holes Grip Backup Pad for both Pneumatic and Electric Sander

Maximum Speed 13,000 RPM
Medium density;
48 Hole Dust Extraction
5/16" x 24 male thread attachment
Compatible with 6" size grip hook & loop sanding and Mirka 's Net Sanding dust extraction system.



TM509

70 X 198 mm Hook and Loop sanding Pad For Mirka DEOS 383CV

Maximum Speed 10,000 RPM
Weight 75g
Medium density
56 Hole Dust Extraction.



TM510

80*133MM Hook and Loop sanding Pad For Mirka DEOS OS 353CV

Maximum Speed 10,000 RPM
Weight 46g
Medium density
54 Hole Dust Extraction.



TM2061

6 inch hook and loop soft interface pad


Use with TM2060 150mm Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut and closer edge sanding.



TM5202

6 inch muliti hole hook and loop interface pad

Use with TM520 150mm Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut and closer edge sanding.



TM5091

70 X 198 mm Hook and Loop soft interface pad

Use with TM509 Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut and closer edge sanding.



TM5101

80*133MM Hook and Loop soft interface pad

Use with TM510 Back up pad
Thickness 10mm
Adds support to disc pad for improved abrasive cut and closer edge sanding.



TM2010

Soft Hand pad for 150mm Velcro sanding discs.
Strap holds pad on hand
Made with soft foam for conformability and spreading out finger pressure.
Soft foam rubber spreads out sanding pressure.



TM2020

6 inch Hand Sanding Block Mouse Shape
Ideally suited for applications in different market segments such as automotive repair, painting and yacht building
size:148*79mm.



TM2030

70 x 125 mm Heavy Duty Hand Using Rubber Sanding Grinding Block
The product adopts high quality styrene butadiene rubber, durable and wear-resistant.
Both sides of the design pinch bayonet, easy to take.



TM2021

6 inch Round-Shaped Hand Sanding Block
for Hook & Loop sanding disc
Ideally suited for applications in different market segments such as automotive repair, painting and yacht building
size:148*148mm.



TM1050

Manual Sanding Block Sanding Holder for sheets;
Designed to accommodate 210x105mm Velcro sanding abrasive sheets.
With a unique sheet locking system, it prevents the " wavy " effect of the plain sandpaper, achieving the perfect sanding result ;165*85mm/210*105mm.



TM1030

70*400mm Adjustable Flex Longboard Hand Sanding File Block
Can be set to flat ,concave or convex based on sanding needs, maintaining shape during sanding.
Made of durable ABS, wear - resistant and long - lasting.



TM1020

Hook & Loop File Hand Sanding Block
Dust Extraction; Suited for ART body shops, automotive and marine industries.
Consistent Results: Delivers uniform sanding.
Ease of Use: Facilitates sanding in challenging areas and reduces hand fatigue.
Size: TM1020 - 70 x 125mm
TM1020 - 70 x 198mm
TM1020 - 70 x 400mm.



TM1180

Sanding block kit 70x198mm (4 shapes)
It is a multipurpose tool designed for sanding concave, convex and flat surfaces shaped by special adapters.
This ergonomic design allows a more convenient and faster job. The kit consists on 4 bases:
1 pc of Sanding Block 70x 198mm,
1 convex and 2 concave of different degrees.



POLISHING & DETAILING



TL001 WHITE HEAVY CUT POLISHING PAD

ARTICLE NO.	SIZE	PACKING
TL00175W	75*25mm	50pcs/Cart
TL00125W	125*25mm	50pcs/Cart
TL00150W	150*25mm	50pcs/Cart

The WHITE Heavy-Cutting Pads remove the most severe swirls, scratches, water spot etching, and oxidation from painted surfaces in vented and unvented form.



TL001 ORANGE LIGHT CUT POLISHING PAD

ARTICLE NO.	SIZE	PACKING
TL00175O	75*25mm	50pcs/Cart
TL00125O	125*25mm	50pcs/Cart
TL00150O	150*25mm	50pcs/Cart

The Orange light- cutting Pad cuts like a cutting pad to remove light to moderate swirls, scratches, oxidation, and finishes like a finishing pad to restore reflection, clarity, and depth.



TL001 BLUE MEDIUM POLISHING PAD

ARTICLE NO.	SIZE	PACKING
TL00175B	75*25mm	50pcs/Cart
TL00125B	125*25mm	50pcs/Cart
TL00150B	150*25mm	50pcs/Cart

The Blue Light Polishing Pad finishes to restore reflection, clarity, and depth after cutting away heavy defects with a cutting pad, comes in different sizes, and vented and unvented form.



TL001 SOFT BLACK FINISHING PAD

ARTICLE NO.	SIZE	PACKING
TL00175K	75*25mm	50pcs/Cart
TL00125K	125*25mm	50pcs/Cart
TL00150K	150*25mm	50pcs/Cart

BLACK Finishing Pads have no cut, are perfect for spreading final sealant and wax coats in an even layer over freshly-polished paint finishes, come indifferent sizes, and vented and unvented form.





TL020

Green Heavy Cut Foam Pad

Green Pro-Detail Heavy Polishing Pad is a heavy polishing pad designed to retain compound and deliver the most even finish to your polishing regime. The hexagonal cut pad face is designed to ensure an even spread of compound, achieving superior results. Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL02080	80mm	25mm	Flat	3000
TL02025	125mm	25mm	22mm	3000
TL02050	150mm	25mm	22mm	3000



TL021

Yellow Medium Cut foam Pad

The Tmiles car detailing Medium Cut Foam Pad Yellow removes scratches, sanding marks and surface defects in combination with Medium Cut polishes. The special composition of the foam mixture ensures a perfect cut and produces a brilliant gloss. Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL02180	80mm	25mm	Flat	3000
TL02125	125mm	25mm	22mm	3000
TL02150	150mm	25mm	22mm	3000




TL022

Blue Soft Cut Foam Pad

The blue Soft Cut Foam Pad Green helps remove holograms and streaks in combination with Finish polishes, and also prevents clouding. The specially formulated polishing foam guarantees a brilliant, deep gloss and a perfect show car finish. Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL02280	80mm	25mm	Flat	3000
TL02225	125mm	25mm	22mm	3000
TL02250	150mm	25mm	22mm	3000



TL023

Grey Final Finishing Foam Pad

Grey Foam Finishing Pad's strong composition can remove buffer swirls with extra pressure during final finishing. It has very little cut and can apply thin, even layers of waxes, sealants, glazes, and ultra-fine polishes. Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL02380	80mm	25mm	Flat	3000
TL02325	125mm	25mm	22mm	3000
TL02350	150mm	25mm	22mm	3000





TL081

Yellow Coarse Waffle Foam Pad

Waffle Design: The unique waffle pattern minimizes surface contact, promoting cooler operation and reducing the risk of overheating the paint.

Ideal for aggressive removal of severe defects and sanding marks
Applicable for both Rotary & DA polishing.



TL082

White fine Waffle Foam Pad

Waffle Design: The unique waffle pattern minimizes surface contact, promoting cooler operation and reducing the risk of overheating the paint.

Suitable for eliminating moderate surface imperfections while achieving an excellent finish
Applicable for both Rotary & DA polishing.



TL083

Black Ultra-Fine Waffle Foam Pad

Waffle Design: The unique waffle pattern minimizes surface contact, promoting cooler operation and reducing the risk of overheating the paint.

Perfect for final finishing steps, delivering a high-gloss, swirl-free result.
Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL08180	80mm	25mm	Waffle wave	3000
TL08125	125mm	25mm	Waffle wave	3000
TL08150	150mm	25mm	Waffle wave	3000

Reference	SIZE	Depth	Center Hole	Max RPM
TL08280	80mm	25mm	Waffle wave	3000
TL08225	125mm	25mm	Waffle wave	3000
TL08250	150mm	25mm	Waffle wave	3000



TL088

Double Sided Waffle Pad for DA Polisher

Black Foam Double Sided Finishing Waffle Buff Pad is a structured foam pad for hologram removal that gives an excellent finishing on both fresh and fully cured paint works. Offers a good balance between elasticity and density in the foam contributes to the final result.

Features waffle face for better traction, easier user control and less heat generation. Double sided design allows for both sides to be used by simply flipping the pad.

Reference	SIZE	Depth	Center Hole	Max RPM
TL08380	80mm	25mm	Waffle wave	3000
TL08325	125mm	25mm	Waffle wave	3000
TL08350	150mm	25mm	Waffle wave	3000

Reference	SIZE	Depth	Center Hole	Max RPM
TL08820	200mm	50mm	5/8"-11 hole	3000



TL060

Microfiber Cutting Pad for DA Polisher

This heavy cut Microfiber polishing pad is suitable for removing deep scratches on the car, repairing paint defects and polishing a dull car paint back to shine.

The pads are perfect for professional detailers and offer a durable option that can be used over and over again.

Reference	SIZE	Depth	Center Hole	Max RPM
TL06080	80mm	20mm	Flat	3000
TL06025	125mm	20mm	Flat&22mm	3000
TL06050	150mm	20mm	Flat&22mm	3000



TL061

Wool Heavy Cut Buffing Pad

These 5IN (125mm) 6IN(150mm) coarse wool polishing buffing pads are meticulously crafted with a soft and fine texture.

*Lightweight and easy to assemble. These buffing wool pads are designed to be lightweight, making them effortless to handle and install onto your car polisher. Made of natural wool hook materials. Applicable for both Rotary & DA polishing.

Reference	SIZE	Depth	Center Hole	Max RPM
TL06180	80mm	20mm	20mm	3000
TL06125	125mm	20mm	20mm	3000
TL06150	150mm	20mm	20mm	3000

Reference	SIZE	Depth	Center Hole	Max RPM
TL06280	80mm	30mm	20mm	3000
TL06225	125mm	30mm	20mm	3000
TL06250	150mm	30mm	20mm	3000

Reference	SIZE	Depth	Center Hole	Max RPM
TL06380	80mm	20mm	Flat	3000
TL06325	125mm	20mm	Flat	3000
TL06350	150mm	20mm	Flat	3000



TL062

Orange Wool polishing pad

The face of the wool pads is constructed of 100% natural fibres attached to a polyester backing material layers.

Engineered for moderate defects removal, the Medium Wool Polishing Pads offer the perfect balance of cutting power and finishing ability, allowing you to achieve professional-grade results with ease.

Applicable for both Rotary & DA polishing.



TL063

100% Lambs Wool Polishing Pads

Wool polishing pad is suitable for removing deep scratches and restoring dull car paintwork. Thanks to the stitched backing, the polishing pad has an extremely strong structure that will not tear during polishing.

Applicable for both Rotary & DA polishing.





TL010
Single sided White wool cutting pad,M14

- Wool buffing pads are ideal for compounding paint, gelcoat and fiberglass surfaces on boats, cars, RVs and more
- Removes finishing abrasive sand scratches and other paint surface defects
- DESIGNED SPECIFICALLY FOR COMPOUNDING – Use with liquid or paste rubbing compound to remove scratches and heavy oxidation before polishing
- EASY TO USE – Hookit hook-and-loop attachment allows for fast pad changes on rotary buffers;

ARTICLE NO.	SIZE	PACKING
TL010180	180*35mm	40pcs/Cart
TL010181	200*35mm	40pcs/Cart
TL010182	225*35mm	40pcs/Cart



TL011
Double sided White wool cutting pad

- Wool buffing pads are ideal for compounding paint, gelcoat and fiberglass surfaces on boats, cars, RVs and more
- Removes finishing abrasive sand scratches and other paint surface defects
- DESIGNED SPECIFICALLY FOR COMPOUNDING – Use with liquid or paste rubbing compound to remove scratches and heavy oxidation before polishing
- EASY TO USE – Hookit hook-and-loop attachment allows for fast pad changes on rotary buffers;

ARTICLE NO.	SIZE	PACKING
TL010280	180*50mm	20pcs/Cart
TL010281	200*50mm	20pcs/Cart
TL010282	225*50mm	20pcs/Cart



TM630 Microfibre Cleaning Cloth

TM630 is a boxed pull-out microfibre cleaning cloth for dry and wet use. The soft and durable cloth is suitable for vehicle cleaning, interior care, and general workshop wiping.

It offers excellent water absorption and effective dirt removal for everyday detailing and cleaning tasks.

Packing: 50pcs/box

Weight: 200 GSM

Material: 80% Polyester / 20% Polyamide **Size:** 30 × 30 cm **Colour:** Yellow / Green / Blue



TM631 Microfibre Cloth Long Pile

Long pile cloth on both sides with high absorption power.

Multiple microfibre woven cloth suitable for cleaning, polishing, and absorption. Protected seams help avoid leaving marks and allow the application of polishes by hand.

A recommended option for the final cleaning of polished surfaces.

Washable and very durable.

Weight: 350 GSM

Material: 80% Polyester / 20% Polyamide **Size:** 40 × 40 cm **Colour:** Yellow / Green / Blue / Pink



TM632 Soft Finishing Microfibre Cloth

Dual-surface microfibre drying towel with a special lint-free weaving process for better dust collection and clean wiping performance. The soft, highly absorbent fabric can absorb several times its own weight in water and leaves no water marks after wiping.

The soft PE edging helps protect car paint and interior surfaces from scratches. One side features a long-pile surface for drying vehicle body panels after washing, while the mesh side is suitable for wiping glass and removing residue. Ideal for car detailing, finishing work and critical cleaning applications.

Weight: 600 GSM

Material: 80% Polyester / 20% Polyamide **Size:** 40 × 40 cm **Colour:** Grey



PERSONAL PROTECTION

MTPP3 HALF MASK RESPIRATOR

MTPP3 is made from food-grade elastic silicone gum for the guarantee of healthy and comfort. The Face cover can be adjusted freely for perfect adaption and increasing comfort and you may even forget about the face cover after wearing it a few minutes later.

FEATURES

【Fully Adjustable Comfort Strap】 Face cover belt are suitable for most head sizes, designed for tight and comfortable wearing. Comprehensive anti-fog splashing to prevent any invasion of tiny substances. You can see everything you need to see.

【Double Protection】 Face cover adopts double filtration system that can effectively obstruct of organic vapor/gas, smoke, pollen, dust and other particles in the air. It is the ideal respiratory protective device for your life and work.

【Scope of application】 the work areas with chemicals, metals, paints, agricultural substances, methanal and other irritative vapor and gases. During mechanical work such as welding, saw cutting, grinding, graffiti, painting, etc., it can prevent the dust particles from entering the respiratory tract.



Package Includes

- 3 x Half Respirator Face Cover
- 6 x Plastic Covers
- 6 x 6001 Replaceable Filter Boxes
- 24 x 5N11 Filters Cotton





FFP2 Dust Mask



FFP2 Dust Mask with valve



FFP3 Dust Mask with valve



FFP3 Dust Mask with valve

FFP2 filtering half mask is designed to effectively retain dust particles in suspension, mist and smoke. They are very light weighted, comfortable to wear and offer a very low resistance to breathing. It has an adjustable nose clip for a comfortable fit. Do not use this mask for more than 8 hours.

- The masks are in conformity with the EN149:2001+A1:2009
- Packed per 20.

FFP2 Dust Mask with a valve is designed to effectively retain dust particles in suspension, mist and smoke. They are very lightweight, comfortable to wear and offer a very low resistance to breathing. The valve offers greater comfort during the working day in humid environments and/or where the work rate is elevated. Do not use the mask for more than 8 hours.

- The masks are in conformity with the EN149:2001+A1:2009
- Packed per 20.

FFP3 Fine Dust Mask has been designed to effectively retain dust particles in suspension, mist and smoke. The mask is very light, comfortable and offers a very low resistance to breathing. The valve offers greater comfort during the working day in humid environments and/or where the work rate is elevated. Do not use the mask for more than 8 hours.

- The masks are in conformity with the EN149:2001+A1:2009
- Packed per 20.

Safety class FFP3.

- Lightweight structure results in easy breathing and comfortable wear
- Advanced low resistant exhalation valve reduces hot air build-up and makes breathing easy in hot/humid environments
- Ergonomic mask shape provides custom seal for different facial sizes
- Half-face seal foam and adjustable strap reinforce the seal for lowest leakage
- The filtering half masks are in conformity with the EN149:2001+A1:2009
- Packed per 20.

TMiles Industrial Materials And Solutions Co., Ltd.

✉ **Email:** sales@tmilesindustry.com

☎ **TEL:** + 86-19195203381

🌐 **URL:** www.tmilesindustry.com

📍 **ADD:** No. 288, Songshan Road, Huqiu District, Suzhou, Jiangsu, China, 215151

Scan and Contact



YOUR FINISHING MASTER

